


Validation Solution

The device to encode magnetic stripe ticket with a discount



ValiMate

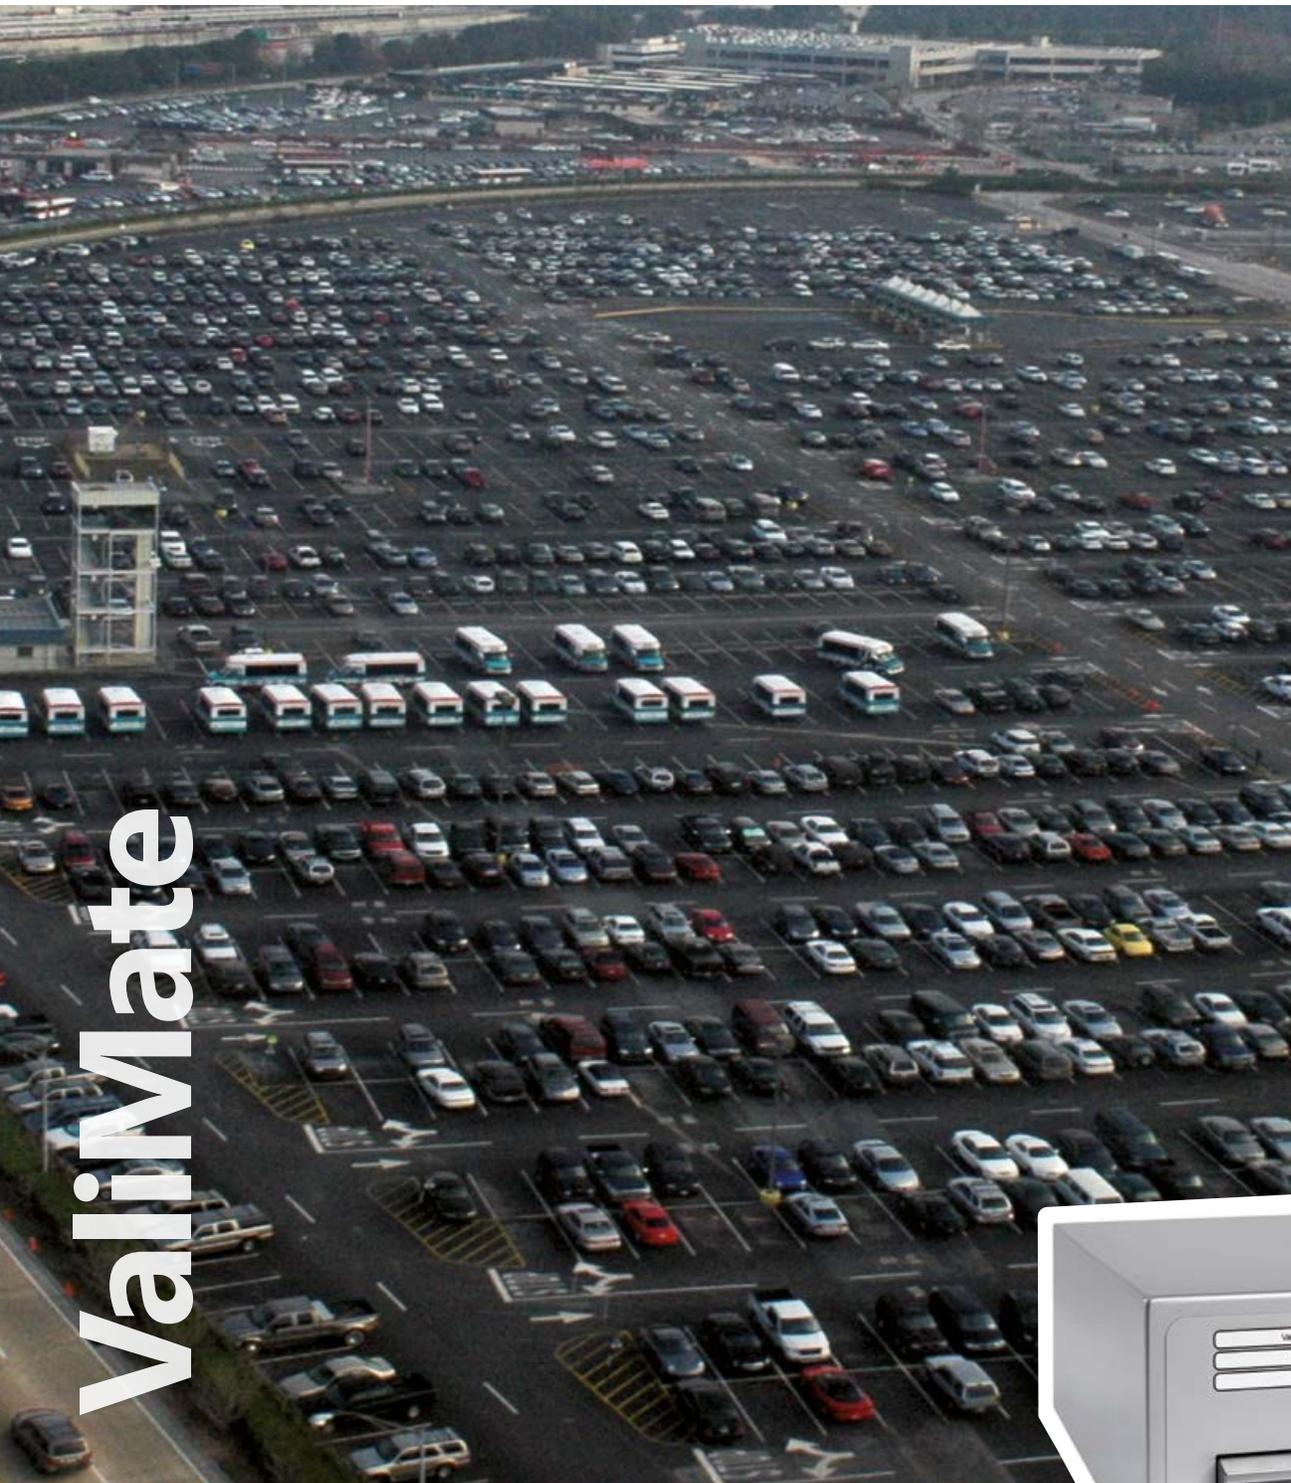

Validation Solution

The device to encode magnetic stripe ticket with a discount

BASE MODEL

Desk-top validator that reads and re-encodes magnetic stripe tickets

Single validation/discount type can be applied by each ValiMate

A single ticket can be encoded several times to accumulate multiple validations /discounts

Highly secure magnetic encoding and error correction logic

Thermal printing of each validation on the ticket

Compact stainless steel housing in RAL 9006 white aluminum

Encoding status indicated by LED (red/yellow/green)

Security lock to resist tampering

External activation (e.g. from cashier till)

OPTIONS

4 discounts from one ValiMate – equipped with illuminated buttons, applicable to different types of discount such as percentage, money value, time or special rate structure

All operating controls are ergonomically designed and can be custom labeled. Label information on paper with transparent plastic window

The ValiMate is a motorized device to encode magnetic stripe tickets with discounted parking. The validation/discount applied is printed onto the ticket and can be repeated up to a maximum of 10 times per ticket. Payment or exit stations will then calculate a pre-determined discount when the ticket is presented. A typical application would be in retail stores that offer discounted parking fees to customers that buy goods from the store. The ValiMate works offline, fully autonomously and requires only AC power. The ValiMate is available in single or 4 discount versions.

STANDARD FEATURES

- Magnetic stripe parking ticket is updated with validation/discount
- Fully autonomous offline operation
- Multiple validations/discounts up to max. 10 times
- Validation/discounts for time, percentage, money value or alternative rate
- Detailed report available from the Management System for validations/discounts used

Dimensions

- Width: 160mm / 6.3"
- Height: 140mm / 5.5"
- Depth: 300mm / 11.8" (including power plug)
- Weight: 5 kg / 11 lbs (without external power supply)

Power

- Power supply: 100 to 240 VAC, 47 to 63 Hz
- Secondary supply voltage: 24DC, 2.5A

Environment

- Ambient temperature: 0°C / 32 F to +40°C / 104 F (in covered/ protected environment)



ValiMate