

HEADQUARTERS

ITALY

FAAC SpA
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
it.info@faacgroup.com - www.faacgroup.com

SUBSIDIARIES

AUSTRALIA

FAAC AUSTRALIA PTY LTD
Homebush – Sydney, Australia
tel. +61 2 87565644
fax +61 2 87565677
www.faac.com.au

AUSTRIA

FAAC GMBH
Salzburg, Austria
tel. +43 662 8533950
fax +43 662 85339525
www.faac.at

FAAC TUBULAR MOTORS
tel. +49 30 56796645
fax +49 30 22409006
faactm.info@faacgroup.com
www.faac-tubularmotors.com

BENELUX

FAAC BENELUX NV/SA
Brugge, Belgium
tel. +32 50 320202
fax +32 50 320242
www.faacbenelux.com

FAAC TUBULAR MOTORS
Schaapweg 30
NL-6063 BA Vlodrop, Netherlands
tel. +31 475 406014
fax +31 475 406018
faactm.info@faacgroup.com
www.faac-tubularmotors.com

BRAZIL

INDÚSTRIAS ROSSI ELETROMECAÂNICA SA
Brasília DF, Brazil
tel. +55 61 33998787
fax +55 61 34046020
www.rossiportoes.com.br

CHINA

FAAC SHANGHAI
Shanghai, China
tel. +86 21 68182970
fax +86 21 68182968
www.faacgroup.cn

FRANCE

FAAC FRANCE
Saint Priest - Lyon, France
tel. +33 4 72218700
fax +33 4 72218701
www.faac.fr

FAAC FRANCE - AGENCE PARIS
Massy - Paris, France
tel. +33 1 69191620
fax +33 1 69191621
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOLETS
Saint Denis de Pile - Bordeaux, France
tel. +33 5 57551890
fax +33 5 57742970
www.faac.fr

GERMANY

FAAC GMBH
Freilassing, Germany
tel. +49 8654 49810
fax +49 8654 498125
www.faac.de

FAAC TUBULAR MOTORS
tel. +49 30 56796645
fax +49 30 22409006
faactm.info@faacgroup.com
www.faac-tubularmotors.com

INDIA

FAAC INDIA PVT. LTD
Noida – Delhi, India
tel. +91 120 3934100/4199
fax +91 120 4212132
www.faacindia.com

IRELAND

NATIONAL AUTOMATION LTD
Co. Roscommon, Ireland
tel. +353 71 9663893
fax: +353 71 9663890
www.nal.ie

MIDDLE EAST

FAAC MIDDLE EAST FZE
Dubai Silicon Oasis Operation Center - Dubai, UAE
tel. + 971 4 3724190
fax+ 971 4 3724191
www.faac.ae

THE NETHERLANDS

KEMKO BV
Doetinchem, Netherlands
tel. +31 314 378777
fax +31 314 362224
www.kemko.nl

NORDIC REGIONS

FAAC NORDIC AB
Perstorp, Sweden
tel. +46 435 779500
fax +46 435 779529
www.faac.se

POLAND

FAAC POLSKA SP.ZO.O
Warszawa, Poland
tel. +48 22 8141422
fax +48 22 8142024
www.faac.pl

RUSSIA

FAAC RUSSIA
Moscow, Russia
tel. +7 (495) 646 24 29
www.faac.ru

SPAIN

CLEM, S.A.U.
San Sebastián de los Reyes - Madrid, Spain
tel. +34 91 3581110
fax +34 91 7293309
www.faac.es

SWITZERLAND

FAAC AG
Altdorf, Switzerland
tel. +41 41 8713440
fax + 41 41 8713484
www.faac.ch

TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ
SAN. VE TİC. LTD. SIRTEKİ
İstanbul, Turkey
tel.+90 (0)212 - 3431311
www.faac.com.tr

UNITED KINGDOM

FAAC UK LTD.
Basingstoke Hampshire, UK
tel. +44 1256 318100
fax +44 1256 318101
www.faac.co.uk

U.S.A.

FAAC INTERNATIONAL INC
Rockledge, FL - U.S.A.
tel. +1 866 925 3222
fax +1 904 448 8958
www.faacusa.com

FAAC INTERNATIONAL INC
Fullerton, California - U.S.A.
tel. +1 714 446 9800
fax +1 714 446 9898
www.faacusa.com



For an on-going product improvement, FAAC S.p.A. reserves the right to make technical modifications without prior notice. All rights are reserved and the reproduction, in any form or by any means, of the whole or any part of this publication, is forbidden without prior permission of FAAC S.p.A.



412

Electro - mechanical operator for swing leaf gates



FAAC

Simply automatic.

ELECTRO - MECHANICAL SWING GATE OPERATOR

- Non reversing operator, does not require electric lock
- Applications with lower manoeuvring intensity
- Simplified installation and maintenance
- Anti-crushing safety thanks to the electronic device

 SAFEzone System:
412 + E145 + SAFEcoder


 GREENTECH System:
412 + E145



ACCESSORIES



- E145 control board
- Easy to program using the LCD display.
 - Automatically adapts to different input voltages
 - Added connectivity - supports BUS 2EASY and can be programmed from PC/MAC
 - Embedded radio decoding to support original FAAC transmitters and 5 pin connector for existing radio controls
 - Obstacle detection, reverse on contact and maximum precision of deceleration positions when used with SAFEcoder

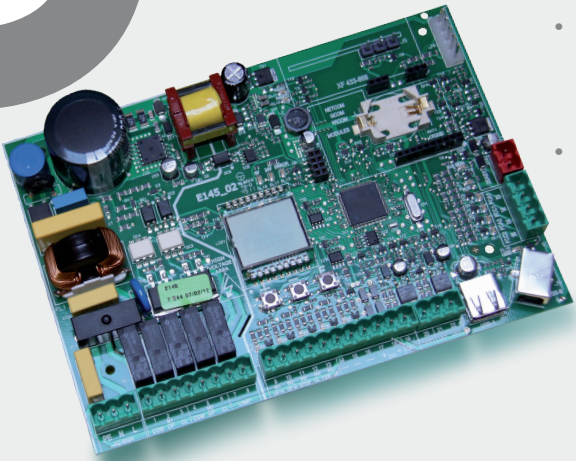

- Technology: electro-mechanical
- Version: 230VAC
- Application: residential
- Use: single max leaf length of 1.8 m

DIMENSIONS AND TECHNICAL SPECIFICATIONS OF 412

	412		412
Power supply voltage	230V~ (+6% - 10%) 50 (60) Hz	Thermal protection or motor winding	140° C
Absorbed voltage	280W	Operating ambient temperature	-20° C ÷ +55° C
Absorbed current	1.5 A	Protection class	IP 44
Motor rotation speed	1400 rpm	Leaf max. weight	6,5 kg kg
Rod extension speed	16 mm/s	Dimensions (LxDxH) in mm	1000 x 90 x 195
Max traction and thrust force	3500N		