

**PROUD TO PRESENT TO YOU
OUR MADE IN ITALY SOLUTIONS
DEVELOPED WITH PASSION**



CATALOGUE 03.2015



ROGER[®]
TECHNOLOGY
AUTOMAZIONI EVOLUTE

PEOPLE THAT BELIEVE THAT CREATE IS LIVING AND THAT LIVE
EVERY DAY WITH BIG PROUD FOR WHAT THEY PRODUCE



THE COMPANY



PEOPLE WHO BELIEVE THAT CREATING IS LIVING.

Welcome to Roger Technology world, where you will find a company that is much more than a simple name.

First of all you will get to know a brand that every day promises a great experiences to the professionals and to the customers in the world of Home Automation.

Company Profile

Thanks to more than 25 years of experience in the world of Home Automation Roger Technology is one of the Italian leading companies specializing in designing and production of the integrated automation systems. We design, produce and sell automation systems for gates, garage doors and road barriers for the residential, commercial and industrial sectors.

Company Mission

Our main mission is to offer a complete suite of solutions and products that, thanks to our excellent internal business model, allows us to design, develop and offer to the market an ample range of integrated systems for the Home automation business.

Company Vision

Roger's philosophy is fully based on a careful care of all the engineering, design and production processes, with the main scope of the offered solutions:

- technological and innovative for installer
- easy and comfortable for end- users
- secure, qualitative and confidence for the market



THE ROGER CULTURE



OUR CULTURE: THE REAL HERITAGE OF OUR COMPANY

Roger Technology is not just a company that produces solutions for home automations, but mainly it is a company with the philosophy that was born around the products with a big innovative and creative soul.

People and Ideas

The life of Roger Technology has always been founded in the value of people extremely rich of passion. People that never back down, people that choose the big challenges to avoid being monotonous. People that believe that whichever brilliant idea gives the life to a big change towards a great future.

Creative Innovation

The main element of our company heritage is the continuous creative innovation that marks all our solutions. With Roger Technology, innovation and creativity are melted in a unique concept that expresses a real experience towards the real customer needs.

Safety and Technology

Safety and technology represent a big ally of the culture of Roger Technology. Whichever thing that we think, that we produce and that we put in the hand of our customers, it must be thought and developed with the maximum available technology and guarantee the best standard of safety.

Product Expertise

In our language we translate the word "experience" in passion. For us the passion is everything, it is a big value that every day push ourselves towards a continuous and strong criticism in developing products and solutions that have to be linked with the real needs of our customers who desire a product designed around their way to work.

Quality & Made in Italy

All solutions, products, design and the complete production process of Roger Technology is developed in Italy with the use of materials of primary quality always found in the market through partner suppliers that share the same passion and professionalism of our company in developing products technologically reliable, efficient and simple in the way that they have been made for being installed and used.

Market dialogue

We develop and love the dialogue between our company and our customers, since we are extremely convinced that only thanks to the capability to listen to the market, we can create better solutions around the customer needs.

Useful tips for the best consultation

The new catalogue price list of Roger Technology has been designed for an easy consultation of our products and solutions in order to make easy and fast the research of the best choice according to your needs.

Consultation by product categories



Sliding gates

The automations of Roger Technology. they are able to cover a range of sliding gates starting from 300 Kg to more than 2200 Kg of weight. All models are available with mechanic and magnetic limit switch.



Swing gates

The automations of Roger Technology for the swing gates have been designed in 8 different versions, automations for swing, automations for swing with articulated arms e automations for underground swing gates with the relative foundation boxes.



Sectional doors

The automations of Roger Technology for the sectional doors have been developed in four version with engine from 650N and engine from 1000N, that allow to open doors with weight till 100 Kg. The transmission is with chain and all of them are equipped with strong guides made in aluminum of 3/4 meters.



Overhead doors

The automations of Roger Technology for the overhead doors, allow to open with ease the residential and condominium garage doors till to 8 m² of surface.



Control units

The control units of Roger Technology allow to handle all our automations designed for one or two engines. They are equipped with a lot of programmable functions created to respect all the safety norms.



Accessories & Security

The product range of Roger Technology is completed with an ample choice regarding the electronic solutions. In this section you can find out all the accessories and security systems that include Flashings, antennas, the series of external and built-in photocells, synchronized or adjustable and the set of built-in or external key selectors available with standard or European cylinders.

Catalogue symbology

SYMBOLY PER SECTORS



Residential



Commercial



Industrial



Power 24V



Power 115V



Power 230V



Power 380V



Products news



Encoder

PRODUCTS COMPOSTITION


KIT

It represents a group of more products contained in a unique box.

SET

It represents a group of more products contained in a different boxes.


SLIDING GATES SERIES M30

Product	Code	Description	Pcs/pallet
 230V AC	M30/323	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	44



Accessories	Code	Description	Pcs/pallet
	KT220	Raised fixing plate for M30 series.	
	KT223	Fixing plate with stay bolts and screws M30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	


SLIDING GATES SERIES M30

Product	Code	Description	Pcs/pallet
 230V AC	M30/324	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	44



Accessories	Code	Description	Pcs/pallet
	KT220	Raised fixing plate for M30 series.	
	KT223	Fixing plate with stay bolts and screws M30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES M30

Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC	KIT M30/325	KIT M30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.		28




COMPOSITION KIT M30/325

M30/323	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT220	Raised fixing plate for M30 series.	
	KT223	Fixing plate with stay bolts and screws M30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES M30

Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC	KIT M30/326	KIT M30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.		28



COMPOSITION KIT M30/326

M30/324	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 400 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT220	Raised fixing plate for M30 series.	
	KT223	Fixing plate with stay bolts and screws M30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES H30

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC

H30/643

Electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.

44



Accessories	Code	Description	Pcs/pallet
	KT214	Fixing plate with stay bolts and screws H30 series.	
	KT214/SC	Adapter plate with stay bolts and screws H30 series.	
	KT221	Raised fixing plate for H30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES H30

Product	Code	Description	Pcs/pallet
	H30/644	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	44




230V AC



Accessories	Code	Description	Pcs/pallet
	KT214	Fixing plate with stay bolts and screws H30 series.	
	KT214/SC	Adapter plate with stay bolts and screws H30 series.	
	KT221	Raised fixing plate for H30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES H30

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



KIT H30/645 KIT H30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.

28

COMPOSITION KIT H30/645

H30/643	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT214	Fixing plate with stay bolts and screws H30 series.	
	KT214/SC	Adapter plate with stay bolts and screws H30 series.	
	KT221	Raised fixing plate for H30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES H30

Product	Code	Description	Pcs per Box.	Pcs/pallet
	KIT H30/646	KIT H30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.		28





COMPOSITION KIT H30/646

H30/644	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 600 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT214	Fixing plate with stay bolts and screws H30 series.	
	KT214/SC	Adapter plate with stay bolts and screws H30 series.	
	KT221	Raised fixing plate for H30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	



SLIDING GATES SERIES R30

Product	Code	Description	Pcs/pallet
 	R30/803	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	44



Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	




SLIDING GATES SERIES R30

Product	Code	Description	Pcs/pallet
 	R30/804	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	44






Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs/pallet
 230V AC 	R30/1203	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	44
			


Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs/pallet
 230V AC 	R30/1204	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	44
			

Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	


SLIDING GATES SERIES R30

Product	Code	Description	Pcs/pallet
 380V AC	R30/1209	Electromechanical motor 380V TRIPHASE irreversible ideal for sliding gates up to 1200 Kg. without control unit and mechanical limit switch.	44



Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC	KIT R30/805	KIT R30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.		28




COMPOSITION KIT R30/805

R30/803	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC	KIT R30/806	KIT R30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.		28



COMPOSITION KIT R30/806

R30/804	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



230V AC

KIT R30/1205

KIT R30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.

28



Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES R30

Product	Code	Description	Pcs per Box.	Pcs/pallet
230V AC	KIT R30/1206	KIT electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.		28



COMPOSITION KIT R30/1206

R30/1204	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT210	Fixing plate with stay bolts and screws for R30 series.	
	KT211	Pair of side angles bars complete with screws.	
	KT212	Raised fixing plate for R30 series.	
	KT213	Fixing plate and angles bars kit for R30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES G30

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC

G30/1803

Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1800 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.

40



Accessories	Code	Description	Pcs/pallet
	KT215	Fixing plate with stay bolts and screws G30 series.	
	KT222	Raised fixing plate for G30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES G30

Product	Code	Description	Pcs/pallet
	G30/1804	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1800 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	40



230V AC



Accessories	Code	Description	Pcs/pallet
	KT215	Fixing plate with stay bolts and screws G30 series.	
	KT222	Raised fixing plate for G30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES G30

Product	Code	Description	Pcs/pallet
	G30/2203	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 2200 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.	40






230V AC





Accessories	Code	Description	Pcs/pallet
	KT215	Fixing plate with stay bolts and screws G30 series.	
	KT222	Raised fixing plate for G30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES G30

Product	Code	Description	Pcs/pallet
  	G30/2204	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 2200 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	40




Accessories	Code	Description	Pcs/pallet
	KT215	Fixing plate with stay bolts and screws G30 series.	
	KT222	Raised fixing plate for G30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES G30

Product	Code	Description	Pcs/pallet
 	G30/2205	Electromechanical motor 380V TRIPHASE irreversible ideal for sliding gates up to 2500 Kg. without control unit and mechanical limit switch.	40




Accessories	Code	Description	Pcs/pallet
	KT215	Fixing plate with stay bolts and screws G30 series.	
	KT222	Raised fixing plate for G30 series.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	MC755	Pairs of clips for mechanical limit switch.	
	MC756	Pairs of magnets for magnetic limit switch.	
	MC772	Mechanical limitswitch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC773	Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC774	Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC775	Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	MC771	Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES E30

Product	Code	Description	Pcs/pallet
  	E30/800	Electromechanical underground motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with magnetic limit switch, magnetic encoder, without control unit. With cold galvanised steel foundation box.	24

Accessories	Code	Description	Pcs/pallet
	FU800	Cold galvanised foundation box series E30.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	R99/C/001	Signboard Automatic Opening".	

SLIDING GATES SERIES E30

Product	Code	Description	Pcs per Box.	Pcs/pallet
  	SET E30/800	Electromechanical underground motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with magnetic limit switch, magnetic encoder, with control unit H70/105AC/BOX in plastic box. With cold galvanised steel foundation box.		
COMPOSITION SET E30/800				
	E30/800	Electromechanical underground motor 230V AC irreversible ideal for sliding gates up to 800 Kg. with magnetic limit switch, magnetic encoder, without control unit. With cold galvanised steel foundation box.	1	
	H70/105AC/BOX	Control unit for 1 motor 230V AC 50/60Hz with slow down. For universal use, in plastic box.	1	

Accessories	Code	Description	Pcs/pallet
	FU800	Cold galvanised foundation box series E30.	
	GA550	Galvanised steel rack 22x22x1000 module 4.	
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	
	GA553	Nylon rack module 4 with 6 connectors L.1000.	
	GA554	Pocket of 6 spacers and screws.	
	R99/C/001	Signboard Automatic Opening".	


SLIDING GATES

SERIES M30




TECHNICAL SPECIFICATIONS	M30/323 - KIT M30/325	M30/324 - KIT M30/326
Power:	230V AC 50Hz	230V AC 50Hz
Power rating:	210W	210W
Max thrust:	250N	250N
Frequency of use:	50%	50%
Motor thermal protection:	150°C	150°C
Operating temperature:	-20+55°C	-20+55°C
Protection level:	IP43	IP43
Manoeuvre speed:	9.5 m/min	9.5 m/min
Max gate weight:	400 Kg	400 Kg
Limitswitch:	Mechanical limitswitch	Magnetic
Encoder:	Optical	Optical
Onboard control unit	H70/104AC	H70/104AC

Dimensions

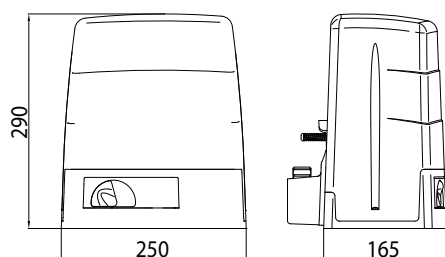

Predisposition for standard installation

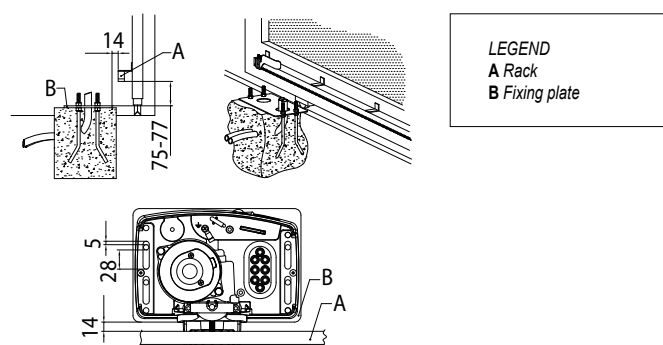


SERIES H30




TECHNICAL SPECIFICATIONS	H30/643 - KIT H30/645	H30/644 - KIT H30/646
Power:	230V AC 50Hz	230V AC 50Hz
Power rating:	240W	240W
Max thrust:	300N	300N
Frequency of use:	50%	50%
Motor thermal protection:	150°C	150°C
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP43	IP43
Manoeuvre speed:	9.5 m/min	9.5 m/min
Max gate weight:	600Kg	600Kg
Limitswitch:	Mechanical limitswitch	Magnetic
Encoder:	Optical	Optical
Onboard control unit	H70/104AC	H70/104AC

Dimensions

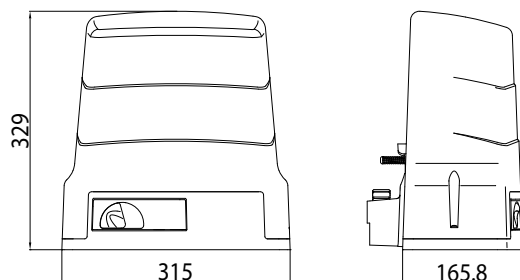

Predisposition for standard installation

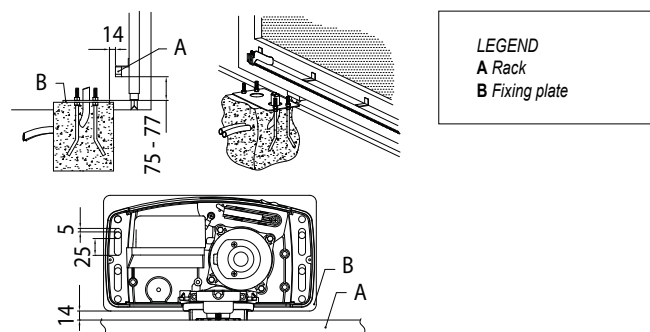


SLIDING GATES

SERIES R30




TECHNICAL SPECIFICATIONS	R30/803 KIT R30/805	R30/804 KIT R30/806	R30/1203 KIT R30/1205	R30/1204 KIT R30/1206	R30/1209
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	380V AC 50Hz
Power rating:	350W	350W	420W	420W	450W
Max thrust:	500N	500N	800N	800N	850N
Frequency of use:	50%	50%	50%	50%	50%
Motor thermal protection:	150°C	150°C	150°C	150°C	150°C
Operating temperature:	-20+55°C	-20+55°C	-20+55°C	-20+55°C	-20+55°C
Protection level:	IP43	IP43	IP43	IP43	IP43
Manoeuvre speed:	9.5 m/min	9.5 m/min	9.5 m/min	9.5 m/min	9.5 m/min
Limitswitch:	Mechanical limitswitch	Magnetic	Mechanical limitswitch	Magnetic	Mechanical limitswitch
Max gate weight:	800kg	800kg	1200kg	1200kg	1200kg
Encoder:	Optical	Optical	Optical	Optical	-
Onboard control unit	H70/104AC	H70/104AC	H70/104AC	H70/104AC	-

Dimensions

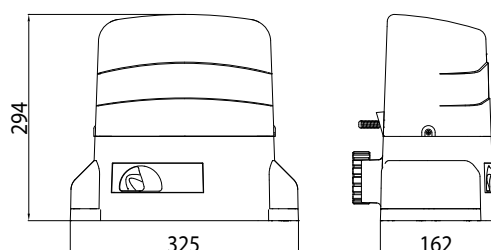

Predisposition for standard installation

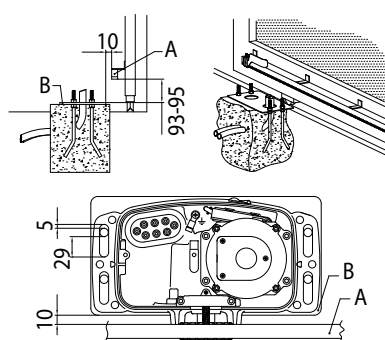

LEGEND
A Rack
B Fixing plate



SLIDING GATES

SERIES G30




TECHNICAL SPECIFICATIONS	G30/1803	G30/1804	G30/2203	G30/2204	G30/2205
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	380V AC 50Hz
Power rating:	520W	520W	580W	580W	850W
Max thrust:	1200N	1200N	1500N	1500N	1650N
Frequency of use:	50%	50%	50%	50%	50%
Motor thermal protection:	150°C	150°C	150°C	150°C	150°C
Operating temperature:	-20+55°C	-20+55°C	-20+55°C	-20+55°C	-20+55°C
Protection level:	IP43	IP43	IP43	IP43	IP43
Manoeuvre speed:	9.5 m/min	9.5 m/min	9.5 m/min	9.5 m/min	9.5 m/min
Limitswitch:	Mechanical limitswitch	Magnetic	Mechanical limitswitch	Magnetic	Mechanical limitswitch
Max gate weight:	1800kg	1800kg	2200kg	2200kg	2500kg
Encoder:	Optical	Optical	Optical	Optical	-
Onboard control unit	H70/104AC	H70/104AC	H70/104AC	H70/104AC	-

Dimensions



Predisposition for standard installation

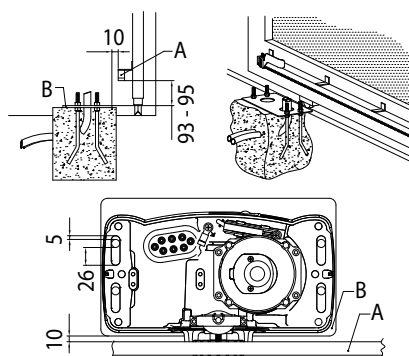

LEGEND
A Rack
B Fixing plate



SLIDING GATES

SERIES E30




TECHNICAL SPECIFICATIONS	E30/800 - SET E30/800
Power:	230V AC 50Hz
Power rating:	350W
Max thrust:	500N
Frequency of use:	50%
Motor thermal protection:	150°C
Operating temperature:	-20+55°C
Protection level:	IP67
Manoeuvre speed:	9.5 m/min
Limitswitch:	Magnetic
Max gate weight:	800kg
Encoder:	Magnetic

Dimensions

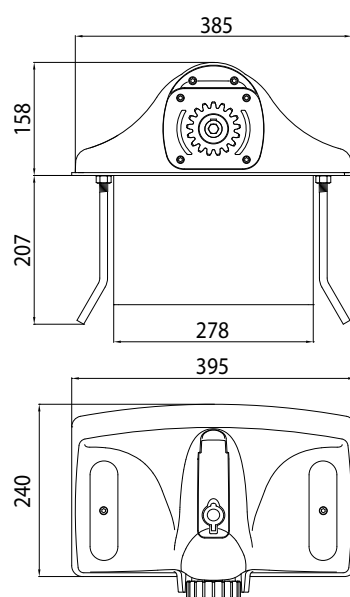


Predisposition for standard installation

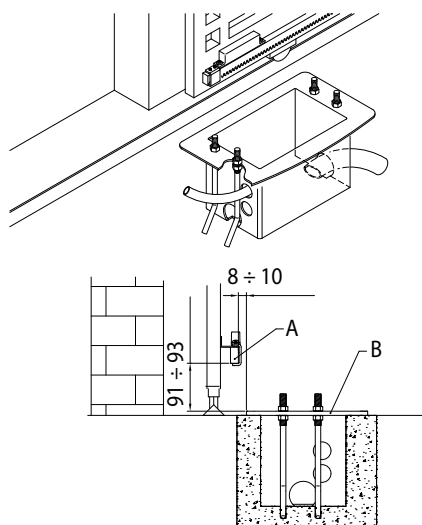

LEGEND
A Rack
B Fixing plate



SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
	R20/300	Electromechanical actuator 230V AC irreversible for swing gate with leaf up to 2.5 mt. short, fast, with 1 microswitch, complete with fixing plates.	50



Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	


SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
 	R20/300MS	Electromechanical actuator 230V AC irreversible for swing gate with leaf up to 2.5 mt. short, fast, with adjustable mechanical stopper in opening and closing.	50



Accessories	Code	Description	Pcs/pallet
	MC781	Kit mechanical stop BR20 series, R20/300MS and R20/500MS.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
	R20/302	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. short, slow, with 1 microswitch, complete with fixing plates.	50



Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

R20/500

Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. long, fast, with 1 microswitch, complete with fixing plates.

36



Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT201	Long front hinge plate.	
	KT203	Long rear hinge plate.	
	KT205	Kit 3 hinge plates long series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
NEW 230V AC	R20/500MS	Electromechanical actuator 230V AC irreversible for swing gate with leaf up to 3.5 mt. long, fast, with adjustable mechanical stopper in opening and closing.	36



Accessories	Code	Description	Pcs/pallet
	MC781	Kit mechanical stop BR20 series, R20/300MS and R20/500MS.	
	KT201	Long front hinge plate.	
	KT203	Long rear hinge plate.	
	KT205	Kit 3 hinge plates long series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20

Product	Code	Description	Pcs/pallet
230V AC	R20/502	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 5 mt. long, slow, with 1 microswitch, complete with fixing plates.	36



Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT201	Long front hinge plate.	
	KT203	Long rear hinge plate.	
	KT205	Kit 3 hinge plates long series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20

Product	Code	Description	Pcs per Box.	Pcs/pallet
230V AC	KIT R20/310	Kit R20 Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 2,5 mt. short, fast, with 1 microswitch, complete with fixing plates.		21





COMPOSITION KIT R20/310

R20/300	Electromechanical actuator 230V AC irreversible for swing gate with leaf up to 2.5 mt. short, fast, with 1 microswitch, complete with fixing plates.	2
H70/200AC/BO X	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R20



Product	Code	Description	Pcs per Box.	Pcs/pallet
 	KIT R20/510	Kit R20 Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. long, fast, with 1 microswitch, complete with fixing plates.		18

COMPOSITION KIT R20/510

R20/500	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. long, fast, with 1 microswitch, complete with fixing plates.	2
H70/200AC/BO X	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1




Accessories	Code	Description	Pcs/pallet
	MC770	Kit optional microswitch in closing with cable series R20.	
	MC780	Kit mechanical stop R20 series.	
	KT201	Long front hinge plate.	
	KT203	Long rear hinge plate.	
	KT205	Kit 3 hinge plates long series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES M20

Product	Code	Description	Pcs/pallet
 	M20/340	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3 mt. short, fast, with encoder, 1 microswitch and mechanical stopper for opening.	50




Accessories	Code	Description	Pcs/pallet
	MC778	Kit optional 2° limit switch series M20.	
	MC779	Kit mechanical stop for M20 - G20 - H20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES M20




Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC  	SET M20/342	Set of 2 electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3 mt. short, fast, with encoder, 1 microswitch and mechanical stopper in opening. Complete with electronics kit.		
	COMPOSITION SET M20/342			
	M20/340	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3 mt. short, fast, with encoder, 1 microswitch and mechanical stopper for opening.	2	
	KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1	
	Composition KIT H70/22			
	H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
	R92/LED230	LED flashing light series R92 230V AC.	1	
	R91/AN1/LR1	Antenna for flashing light R92 series	1	
	R99/C/001	Signboard "Automatic Opening"	1	

Accessories	Code	Description	Pcs/pallet
	MC778	Kit optional 2° limit switch series M20.	
	MC779	Kit mechanical stop for M20 - G20 - H20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES G20

Product	Code	Description	Pcs/pallet
 230V AC  	G20/330	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 2.8 mt. short, fast, with encoder and mechanical stopper in opening.	50
Accessories	Code	Description	Pcs/pallet
	MC779	Kit mechanical stop for M20 - G20 - H20 series.	
	KT202	Short front hinge plate.	
	KT204	Short rear hinge plate.	
	KT206	Kit 3 hinge plates short series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H20

Product	Code	Description	Pcs/pallet
 230V AC  	H20/370	Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 3 mt. short, fast, with encoder, mechanical stopper in opening and closing.	18
Accessories	Code	Description	Pcs/pallet
	MC779	Kit mechanical stop for M20 - G20 - H20 series.	
	KT202	Short front hinge plate.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H20

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC

H20/550

Electromechanical actuator 230V AC irreversible ideal for swing gates with leaf up to 5 mt. long, fast, with encoder, mechanical stopper in opening and closing.

18



Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

MC779

Kit mechanical stop for M20 - G20 - H20 series.

KT201

Long front hinge plate.

R99/C/001

Signboard Automatic Opening".

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

R21/351

Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.

50



Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

FU100

Cold galvanised foundation box and lid.

FU101

Hot galvanised foundation box and lid.

FU102

Hot galvanised foundation box and inox lid.

FU103

Inox AISI 304 foundation box and lid.

KT207

Standard installation accessories series R21.

KT229

Standard installation accessories series R21 (FU103 INOX).

LT300

Levers for opening up to 125°.

LT301

Levers for opening up to 360°.

RL650

Release system with standard lever.

RL651

Release system with european cylinder key.

RL652

Standard release lever for underground.

RL663

Long release lever for underground.

R99/C/001

Signboard Automatic Opening".

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

230V AC

R21/351SUB



Electromechanical underground motor 230V AC irreversible, SUB version water resistant, ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.

50





Accessories	Code	Description	Pcs/pallet
	FU100	Cold galvanised foundation box and lid.	
	FU101	Hot galvanised foundation box and lid.	
	FU102	Hot galvanised foundation box and inox lid.	
	FU103	Inox AISI 304 foundation box and lid.	
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL650	Release system with standard lever.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
 	R21/361	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 10 mt cable.	50

Accessories	Code	Description	Pcs/pallet
	FU100	Cold galvanised foundation box and lid.	
	FU101	Hot galvanised foundation box and lid.	
	FU102	Hot galvanised foundation box and inox lid.	
	FU103	Inox AISI 304 foundation box and lid.	
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL650	Release system with standard lever.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
 	R21/362	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Double bearings version with 10 mt cable.	50

Accessories	Code	Description	Pcs/pallet
	FU100	Cold galvanised foundation box and lid.	
	FU101	Hot galvanised foundation box and lid.	
	FU102	Hot galvanised foundation box and inox lid.	
	FU103	Inox AISI 304 foundation box and lid.	
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL650	Release system with standard lever.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



NEW **230V AC** **R21/362SUB** Electromechanical underground motor 230V AC irreversible, SUB version water resistant, ideal for swing gates with leaf up to 3,5 mt. TANDEM version with double bearings with 10 mt cable.

50

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

FU100 Cold galvanised foundation box and lid.
FU101 Hot galvanised foundation box and lid.
FU102 Hot galvanised foundation box and inox lid.
FU103 Inox AISI 304 foundation box and lid.
KT207 Standard installation accessories series R21.
KT229 Standard installation accessories series R21 (FU103 INOX).
LT300 Levers for opening up to 125°.
LT301 Levers for opening up to 360°.
RL650 Release system with standard lever.
RL651 Release system with european cylinder key.
RL652 Standard release lever for underground.
RL663 Long release lever for underground.
R99/C/001 Signboard Automatic Opening".

SWING GATES SERIES R21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC **R21/368** Electromechanical underground motor 230V AC irreversible ideal for swing gates up 3,5 mt. Slow, double bearings version with 2mt cable.

50

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

FU100 Cold galvanised foundation box and lid.
FU101 Hot galvanised foundation box and lid.
FU102 Hot galvanised foundation box and inox lid.
FU103 Inox AISI 304 foundation box and lid.
KT207 Standard installation accessories series R21.
KT229 Standard installation accessories series R21 (FU103 INOX).
LT300 Levers for opening up to 125°.
LT301 Levers for opening up to 360°.
RL650 Release system with standard lever.
RL651 Release system with european cylinder key.
RL652 Standard release lever for underground.
RL663 Long release lever for underground.
R99/C/001 Signboard Automatic Opening".

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



230V AC **SET R21/353** Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with cold galvanized treatment, release system with standard lever and electronics kit.

COMPOSITION SET R21/353


R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU100	Cold galvanised foudation box and lid.	2
RL650	Release system with standard lever.	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1

Composition KIT H70/22

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
	SET R21/354	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with hot galvanized treatment, release system with standard lever and electronic kit.		



COMPOSITION SET R21/354


R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU101	Hot galvanised foundation box and lid.	2
RL650	Release system with standard lever.	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1

Composition KIT H70/22

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1


Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
	SET R21/355	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with cold galvanized treatment and INOX lid, release system with standard lever and electronic kit.		
	COMPOSITION SET R21/355			
	R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2	
	FU102	Hot galvanised foundation box and inox lid.	2	
	RL650	Release system with standard lever.	2	
	KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1	
	Composition KIT H70/22			
	H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
	R92/LED230	LED flashing light series R92 230V AC.	1	
	R91/AN1/LR1	Antenna for flashing light R92 series	1	
	R99/C/001	Signboard "Automatic Opening"	1	

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
	SET R21/356	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes INOX and release system with standard lever and electronic kit.		
	COMPOSITION SET R21/356			



R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU103	Inox AISI 304 foundation box and lid.	2
RL650	Release system with standard lever.	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1

Composition KIT H70/22

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
 	SET R21/363	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with cold galvanized treatment, release system with standard lever and electronic kit, with wall antenna and without flashing light.		

COMPOSITION SET R21/363



R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU100	Cold galvanised foudation box and lid.	2
RL650	Release system with standard lever.	2
KIT H70/21	Electronic kit with control unit H70/200AC for two motors, with wall antenna and without flashing light.	1

Composition KIT H70/21

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2
R90/F2ES	Pair of external photocells synchronized.	1
R91/AN1/P1	Antenna designed for wall mounting.	1
R99/C/001	Signboard "Automatic Opening"	1



Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
 	SET R21/364	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with cold galvanized treatment, release system with standard lever and electronic kit, with wall antenna and without flashing light.		
	COMPOSITION SET R21/364			
	R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2	
	FU101	Hot galvanised foundation box and lid.	2	
	RL650	Release system with standard lever.	2	
	KIT H70/21	Electronic kit with control unit H70/200AC for two motors, with wall antenna and without flashing light.	1	
	Composition KIT H70/21			
	H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
	R91/AN1/P1	Antenna designed for wall mounting.	1	
	R99/C/001	Signboard "Automatic Opening"	1	

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
 	SET R21/365	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete of foundation boxes with cold galvanized treatment and INOX lid, release system with standard lever and electronic kit, with wall antenna and without flashing light.		
	COMPOSITION SET R21/365			

R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU102	Hot galvanised foundation box and inox lid.	2
RL650	Release system with standard lever.	2
KIT H70/21	Electronic kit with control unit H70/200AC for two motors, with wall antenna and without flashing light.	1

Composition KIT H70/21

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2
R90/F2ES	Pair of external photocells synchronized.	1
R91/AN1/P1	Antenna designed for wall mounting.	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R21

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



SET R21/366	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Standard version with 2 meters cable. Complete INOX foundation boxes and lid, release system with standard lever and electronic kit, with wall antenna and without flashing light.	
--------------------	---	--

COMPOSITION SET R21/366

R21/351	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 mt. Standard version with 2 mt cable.	2
FU103	Inox AISI 304 foundation box and lid.	2
RL650	Release system with standard lever.	2
KIT H70/21	Electronic kit with control unit H70/200AC for two motors, with wall antenna and without flashing light.	1

Composition KIT H70/21

H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2
R90/F2ES	Pair of external photocells synchronized.	1
R91/AN1/P1	Antenna designed for wall mounting.	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT207	Standard installation accessories series R21.	
	KT229	Standard installation accessories series R21 (FU103 INOX).	
	LT300	Levers for opening up to 125°.	
	LT301	Levers for opening up to 360°.	
	RL651	Release system with european cylinder key.	
	RL652	Standard release lever for underground.	
	RL663	Long release lever for underground.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



Accessories	Code	Description	Pcs/pallet
	FU300DX	Right foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.	
	FU300SX	Left foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.	
	KT226	Standard installation accessories series H21/300.	
	RL730	Lever release system for underground H21/300.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H21

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



Accessories	Code	Description	Pcs/pallet
	FU500DX	Right foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.	
	FU500SX	Left foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.	
	KT227	Standard installation accessories series H21/500	
	RL750	Lever release system for underground H21/500.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H21


Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



COMPOSITION SET H21/310

H21/300	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 3 meters of length.	2
FU300DX	Right foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.	1
FU300SX	Left foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.	1
RL730	Lever release system for underground H21/300.	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1
Composition KIT H70/22		
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

SWING GATES SERIES H21

Product	Code	Description	Pcs per Box.	Pcs/pallet
	SET H21/510	Set of 2 electromechanical underground motors 230V AC irreversible ideal for swing gates with leaf up to 5 meters of length. Complete of foundation boxes made in steel with cataphoresis finishing and with cold galvanized lid, release system with standard lever and electronic kit.		
	COMPOSITION SET H21/510			
	H21/500	Electromechanical underground motor 230V AC irreversible ideal for swing gates with leaf up to 5 meters of length.	2	
	FU500DX	Right foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.	1	
	FU500SX	Left foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.	1	
	RL750	Lever release system for underground H21/500.	2	
	KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1	
	Composition KIT H70/22			
	H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
	R92/LED230	LED flashing light series R92 230V AC.	1	
	R91/AN1/LR1	Antenna for flashing light R92 series	1	
	R99/C/001	Signboard "Automatic Opening"	1	

SWING GATES SERIES R23

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

R23/371

Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. With mechanical limit switch without articulated arms.

48



Accessories	Code	Description	Pcs/pallet
	LT302	Arms short for articulated motor.	
	LT303	Arms long for articulated motor.	
	LT317	Arm straight short for articulated motor.	
	LT318	Arm curved short for articulated motor.	
	LT319	Arm straight long for articulated motor.	
	LT320	Arm curved long for articulated motor.	
	KT218	Gate pull bracket for series articulated.	
	KT208	Plate for fixing to post R23 series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R23

Product	Code	Description	Pcs/pallet
230V AC	R23/372	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. With mechanical limit switch. With short articulated arms.	48



Accessories	Code	Description	Pcs/pallet
	LT302	Arms short for articulated motor.	
	LT303	Arms long for articulated motor.	
	LT317	Arm straight short for articulated motor.	
	LT318	Arm curved short for articulated motor.	
	LT319	Arm straight long for articulated motor.	
	LT320	Arm curved long for articulated motor.	
	KT218	Gate pull bracket for series articulated.	
	KT208	Plate for fixing to post R23 series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R23

Product	Code	Description	Pcs per Box.	Pcs/pallet
230V AC	SET R23/373	Set of 2 electromechanical articulated motors 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. Version with mechanical limit switch, with standard version of short arms and electronic kit.		





COMPOSITION SET R23/373

R23/372	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. With mechanical limit switch. With short articulated arms.	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1
Composition KIT H70/22		
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	KT218	Gate pull bracket for series articulated.	
	KT208	Plate for fixing to post R23 series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES R23

Product	Code	Description	Pcs per Box.	Pcs/pallet
 	SET R23/374	Set of 2 electromechanical motors 230V AC for swing gates with articulated arms ideal for swing gates with leaf up to 3.5 meters of length. Version with mechanical limit switch, with long version arms and electronic kit.		
	COMPOSITION SET R23/374			
	R23/371	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3.5 meters of length. With mechanical limit switch without articulated arms.	2	
	LT303	Arms long for articulated motor.	2	
	KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1	
	Composition KIT H70/22			
	H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
R92/LED230	LED flashing light series R92 230V AC.	1		
R91/AN1/LR1	Antenna for flashing light R92 series	1		
R99/C/001	Signboard "Automatic Opening"	1		
Accessories	Code	Description		Pcs/pallet
	KT218	Gate pull bracket for series articulated.		
	KT208	Plate for fixing to post R23 series.		
	R99/C/001	Signboard Automatic Opening".		

SWING GATES SERIES H23

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC

H23/282

Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 2.8 meters of length. Version with encoder and mechanical limit switch, with standard version of short arms

44



Accessories	Code	Description	Pcs/pallet
	LT302	Arms short for articulated motor.	
	LT317	Arm straight short for articulated motor.	
	LT318	Arm curved short for articulated motor.	
	KT218	Gate pull bracket for series articulated.	
	KT209	Plate for fixing to post H23 series.	
	R99/C/001	Signboard Automatic Opening".	

SWING GATES SERIES H23

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



230V AC

SET H23/284

Set of 2 electromechanical motors 230V AC irreversible ideal for swing gates with leaf up to 2.8 meters of length. Version with encoder, mechanical limit switch, with standard version of short arms and electronic kit.



COMPOSITION SET H23/284

H23/282	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 2.8 meters of length. Version with encoder and mechanical limit switch, with standard version of short arms	2
KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.	1
Composition KIT H70/22		
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow down, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

Accessories	Code	Description	Pcs/pallet
	LT302	Arms short for articulated motor.	
	LT317	Arm straight short for articulated motor.	
	LT318	Arm curved short for articulated motor.	
	KT218	Gate pull bracket for series articulated.	
	KT209	Plate for fixing to post H23 series.	
	R99/C/001	Signboard Automatic Opening".	


SWING GATES

SERIES R20




TECHNICAL SPECIFICATIONS	R20/300 - KIT R20/310	R20/300MS	R20/302
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	215W
Max thrust:	2500N	2500N	2800N
Frequency of use:	40%	40%	40%
Motor thermal protection:	150 C°	150 C°	160 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 43	IP 43	IP 43
Stroke:	320 mm	320 mm	320 mm
Manoeuvre speed:	1,66 cm/s	1,66 cm/s	1,06 cm/s
Opening time at 90°:	19 s	19 s	28 s
Limitswitch:	Microswitch in opening (optional in closing)	Mechanical stopper in opening and closing	Microswitch in opening (optional in closing)
Encoder:	-	-	-

Dimensions

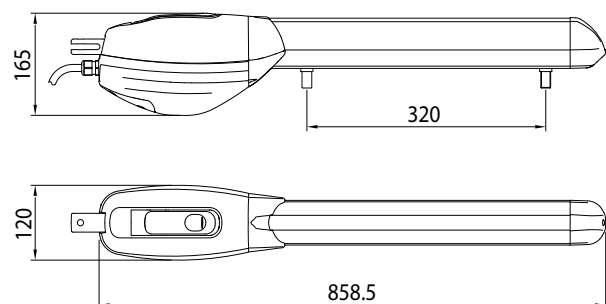

Usage limits

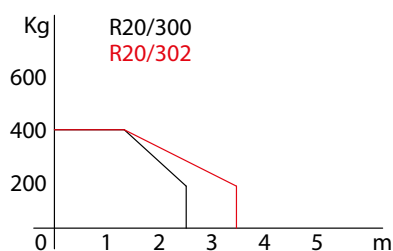

Predisposition for standard installation

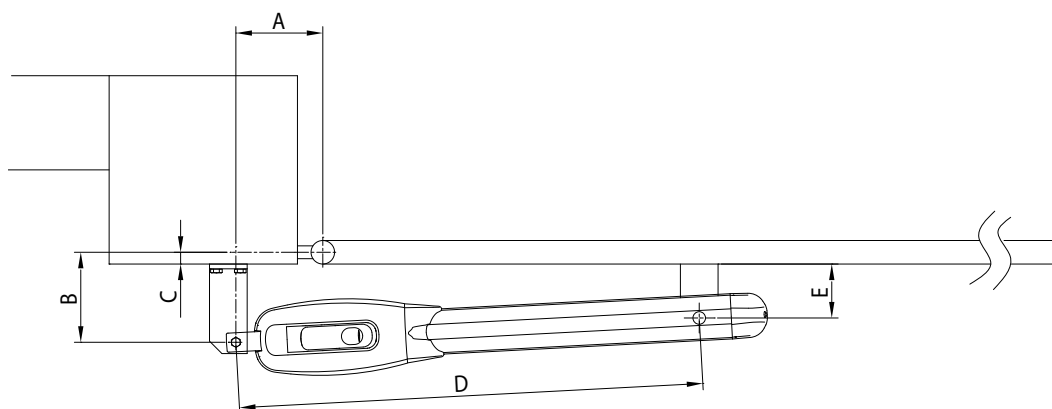


Table quotas

A	B	Angle
130	130	90°
80	170	90°
80	210	90°
100	200	90°
120	140	100°
130	150	105°
150	100	120°
C (max)	D (max)	E
90	730	90


SWING GATES

SERIES R20




TECHNICAL SPECIFICATIONS	R20/500 - KIT R20/510	R20/500MS	R20/502
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	215W
Max thrust:	2500N	2500N	2800N
Frequency of use:	40%	40%	40%
Motor thermal protection:	150 C°	150 C°	160 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 43	IP 43	IP 43
Stroke:	520 mm	520 mm	520 mm
Manoeuvre speed:	1,66 cm/s	1,66 cm/s	1,06 cm/s
Opening time at 90°:	27 s	27 s	42 s
Limitswitch:	Microswitch in opening (optional in closing)	Mechanical stopper in opening and closing	Microswitch in opening (optional in closing)
Encoder:	-	-	-

Dimensions

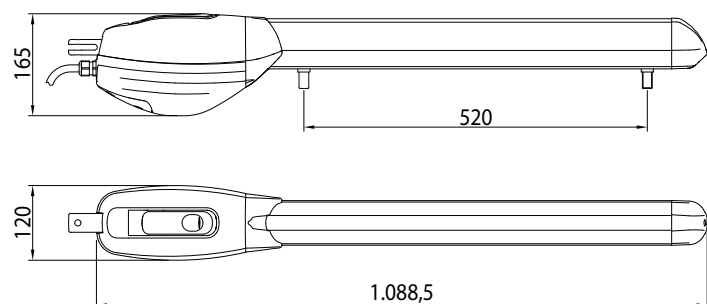

Usage limits

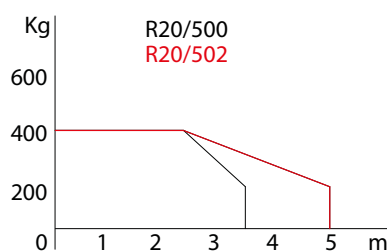

Predisposition for standard installation

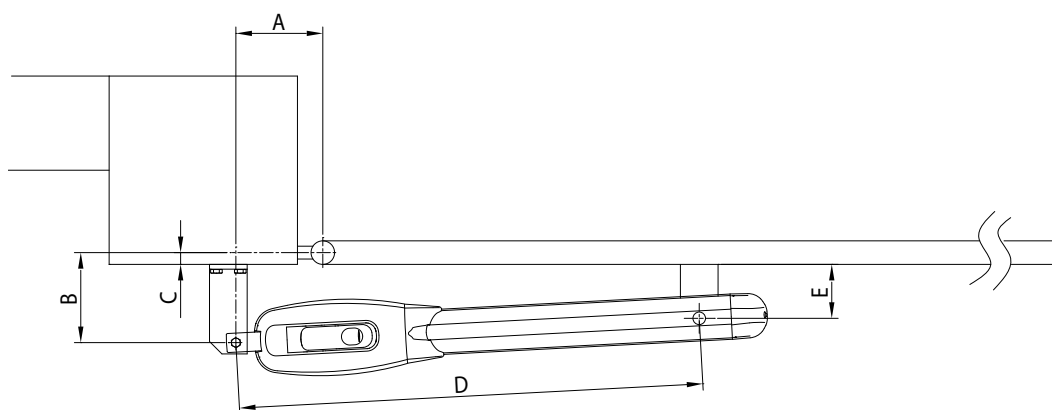


Table quotas

A	B	Angle
100	210	90°
150	210	90°
150	300	90°
250	180	110°
220	200	110°
180	130	120°
210	180	120°
C (max)	D (max)	E
190	950	123


SWING GATES

SERIES M20




TECHNICAL SPECIFICATIONS	M20/340 - SET M20/342
Power:	230V AC 50Hz
Power rating:	200W
Max thrust:	2500N
Frequency of use:	30%
Motor thermal protection:	150 C°
Operating temperature:	-20 C° +55 C°
Protection level:	IP 43
Stroke:	310/340 mm
Manoeuvre speed:	1,66 cm/s
Opening time at 90°:	19 s
Limitswitch:	Microswitch and mechanical stopper in opening (optional in closing)
Encoder:	Optical

Dimensions

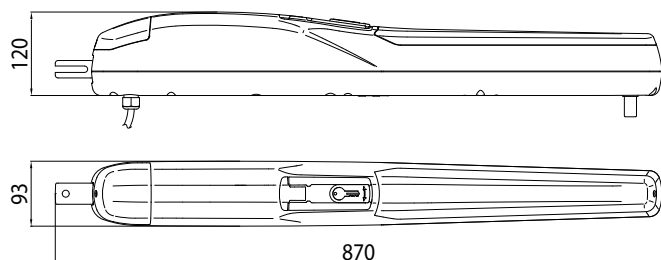

Usage limits

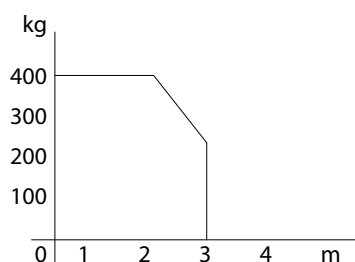

Predisposition for standard installation

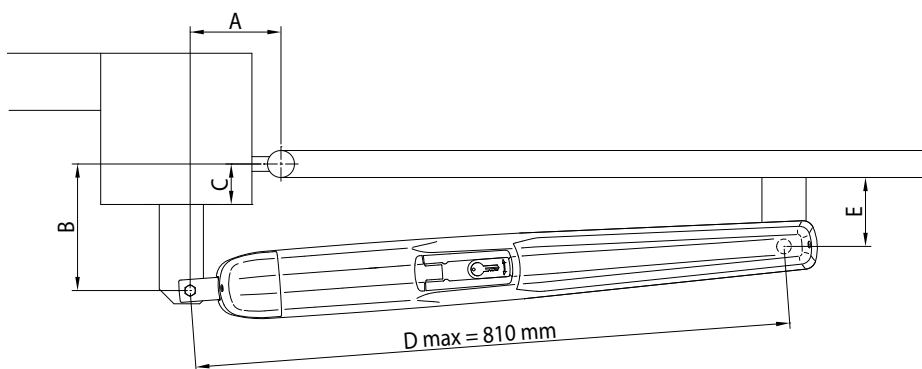


Table quotas

A	B	Angle
130	130	90°
80	170	90°
80	130	90°
100	200	90°
120	140	100°
130	150	105°
150	100	120°
C (max)	D (max)	E
90	810	90


SWING GATES

SERIES G20




TECHNICAL SPECIFICATIONS	G20/330
Power:	230V AC 50Hz
Power rating:	200W
Max thrust:	2500N
Frequency of use:	30%
Motor thermal protection:	150 C°
Operating temperature:	-20 C° +55 C°
Protection level:	IP 43
Stroke:	310/340 mm
Manoeuvre speed:	1,66 cm/s
Opening time at 90°:	19 s
Limitswitch:	Mechanical stopper in opening (optional in closing)
Encoder:	Optical

Dimensions

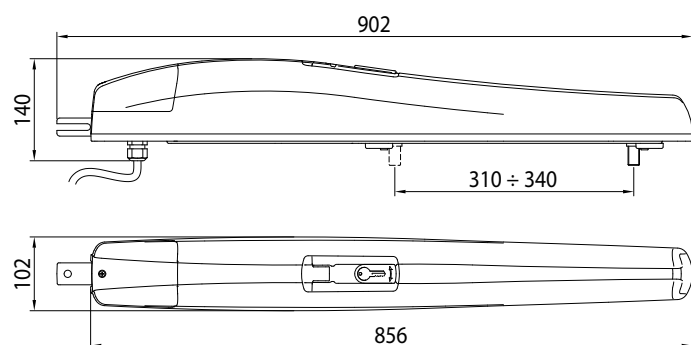

Usage limits



Predisposition for standard installation

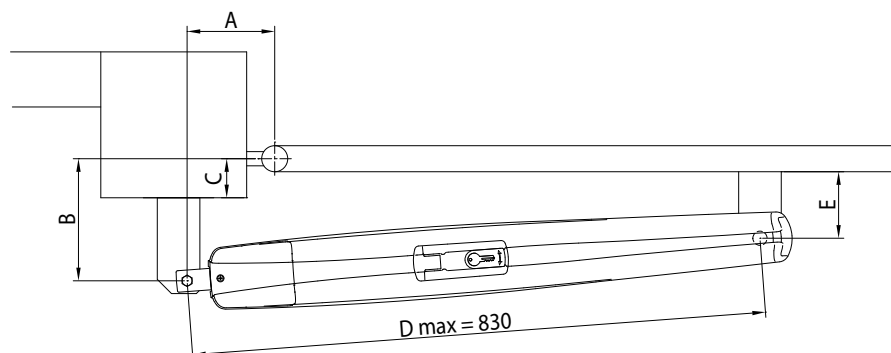


Table quotas

A	B	Angle
130	130	90°
80	170	90°
50	130	90°
100	200	90°
120	140	100°
130	150	105°
150	100	120°
C (max)	D (max)	E
90	830	90°


SWING GATES

SERIES H20



TECHNICAL SPECIFICATIONS	H20/370	H20/550
Power:	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W
Max thrust:	2500N	2500N
Frequency of use:	40%	40%
Motor thermal protection:	150 C°	150 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 43	IP 43
Stroke:	370 mm	550 mm
Manoeuvre speed:	1,66 cm/s	1,66 cm/s
Opening time at 90°:	19 s	27 s
Limitswitch:	Mechanical stopper in opening and closing	Mechanical stopper in opening and closing
Encoder:	Optical	Optical

Dimensions - H20/370 - H20/550

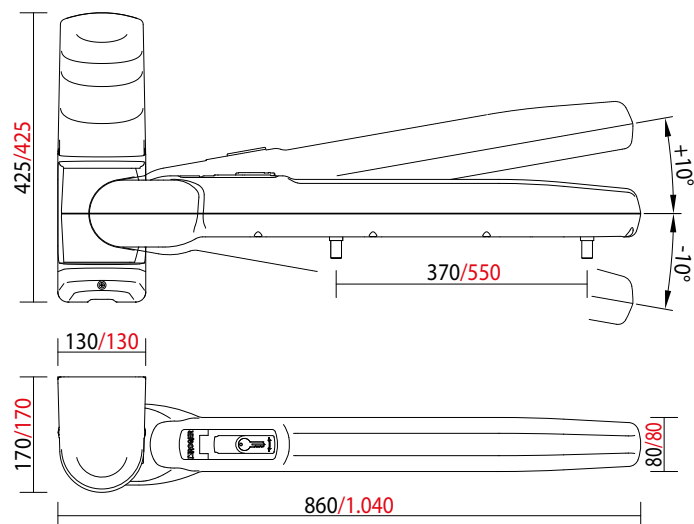

Predisposition for standard installation

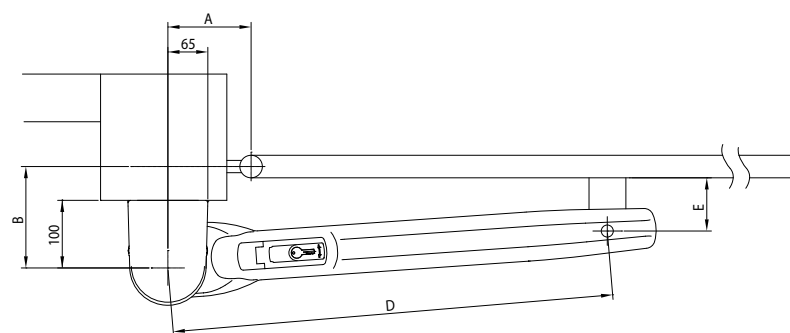



Table quotas H20/370

A	B	Angle
100	125	100°
120	150	105°
13	175	100°
150	200	95°
160	200	95°
170	200	90°
220	150	90°
150	220	95°
150	150	125°
C (max)	D (max)	
90	715	

Table quotas H20/550

A	B	Angle
110	130	100°
125	125	105°
125	175	100°
150	150	95°
175	225	95°
175	250	90°
250	300	90°
250	200	95°
250	130	110°
C (max)	D (max)	
125	895	

Usage limits

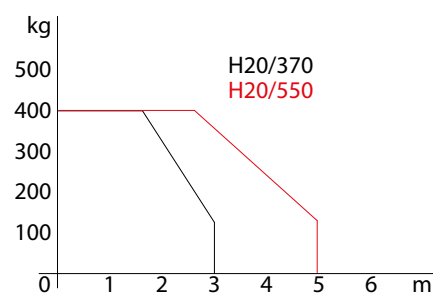

SWING GATES


SERIES R21




TECHNICAL SPECIFICATIONS	R21/351* R21/351SUB	R21/361	R21/362 R21/362SUB	R21/368
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	200W	180W
Max thrust:	300N	300N	300N	250N
Frequency of use:	30%	30%	30%	30%
Motor thermal protection:	150 C°	150 C°	150 C°	150 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 67	IP 67	IP 67	IP 67
Opening time at 90°:	19 s	19 s	19 s	29 s
Power supply cable length:	2 meters	10 meters	10 meters	10 meters
Bearing on main shaft:	Standard	Standard	Double bearings	Double bearings
Limitswitch:	Mechanical stoppers	Mechanical stoppers	Mechanical stoppers	Mechanical stoppers
Maximum opening:	105° (optional 125° - 360°)	105° (optional 125° - 360°)	105° (optional 125° - 360°)	105° (optional 125° - 360°)
Encoder:	-	-	-	-

*technical specifications of R21 / 351 are valid also for the following codes SET: SET R21/353 - SET R21/354 - SET R21/355 - SET R21/356 - SET R21/363 - SET R21/364 - SET R21/365 - SET R21/366


Dimensions

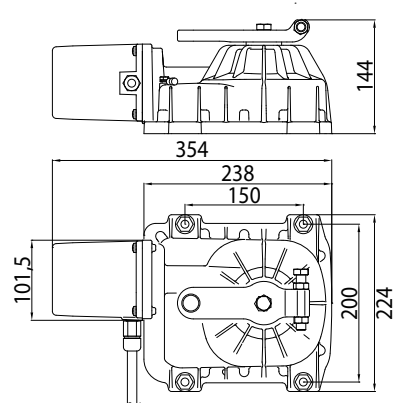

Foundation box

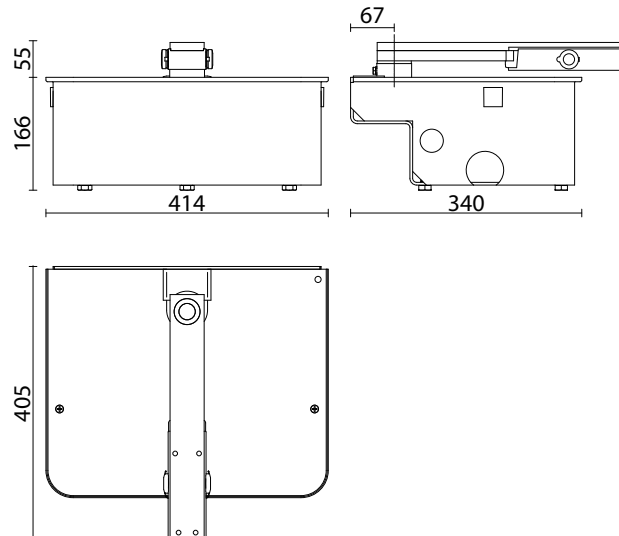


Usage limits




SWING GATES

SERIES H21

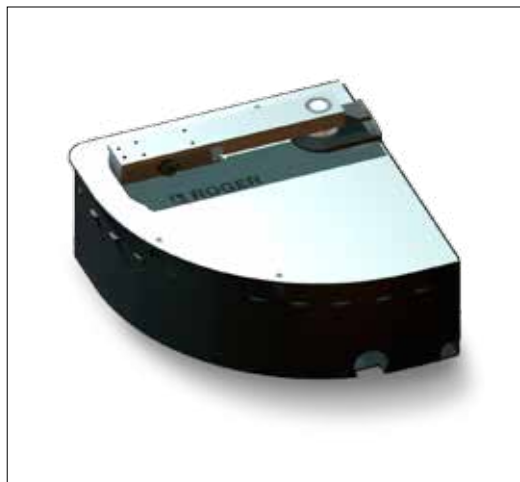


TECHNICAL SPECIFICATIONS	H21/300 SET H21/310	H21/500 SET H21/510
Power:	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	300W
Max thrust:	300N	450N
Frequency of use:	30%	30%
Motor thermal protection:	150 C°	150 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 67	IP 67
Manoeuvre speed:	1,66 cm/s	1,66 cm/s
Opening time at 90°:	19 s	19 s
Limitswitch:	Mechanical stoppers	Mechanical stoppers
Maximum opening:	107°	107°
Encoder:	-	-


Dimensions H21/300 - H21/500

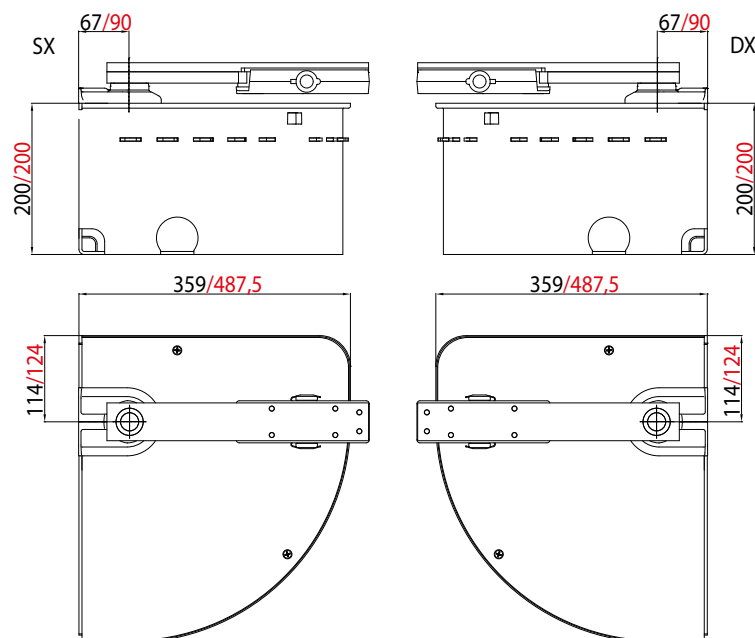

Usage limits H21/300

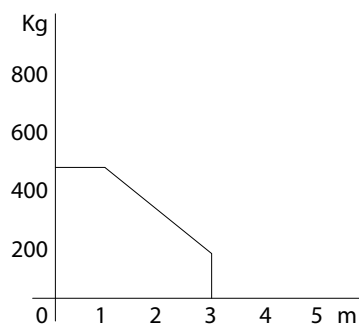

Usage limits H21/500

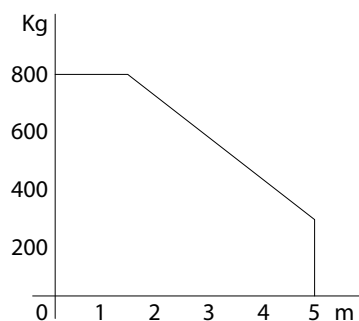


SWING GATES

SERIES R23




TECHNICAL SPECIFICATIONS	R23/371 - R23/372 SET R23/373
Power:	230V AC 50Hz
Power rating:	200W
Max thrust:	400N
Frequency of use:	50%
Motor thermal protection:	150 C°
Operating temperature:	-20 C° +55 C°
Protection level:	IP 43
Opening time at 90°:	14 s
Limitswitch:	Microswitch in opening and closing
Encoder:	-

Dimensions

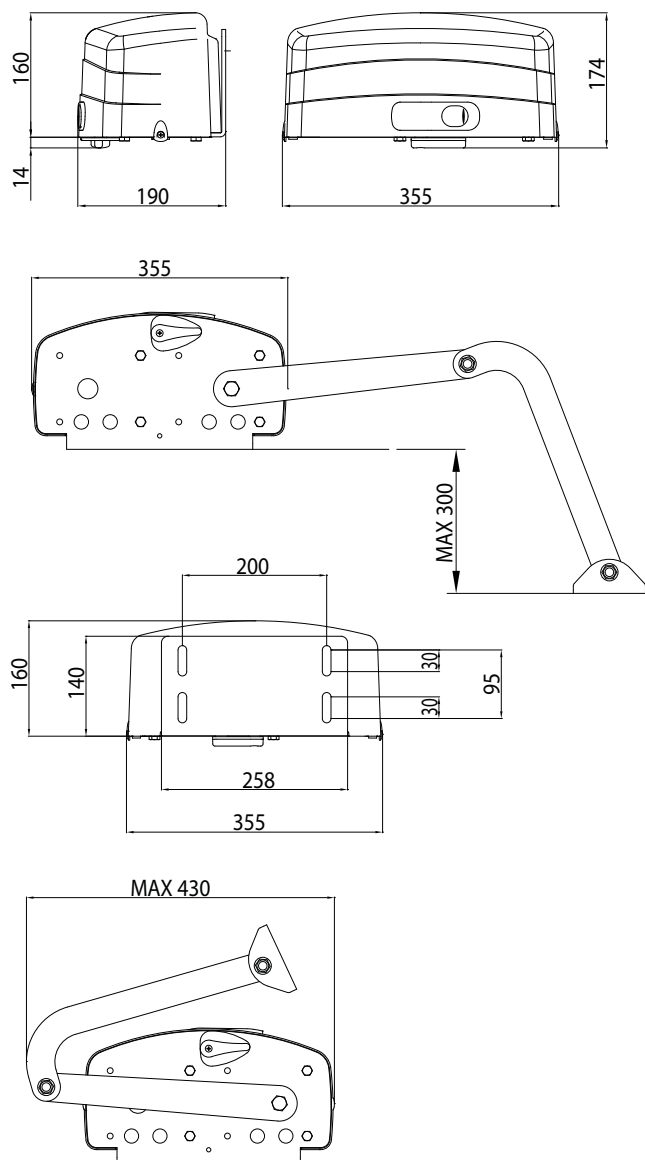

Predisposition for standard installation

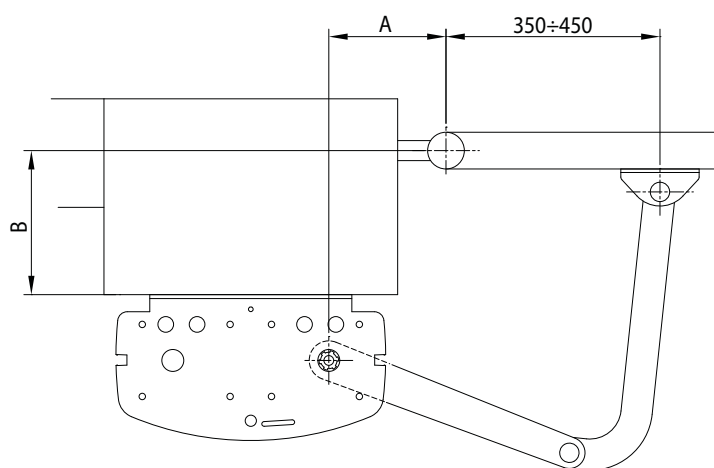

Usage limits




Table quotas

A	B	Angle
120	80	95°
120	300	90°
140	120	100°
160	160	100°
180	200	105°
200	80	115°
200	150	105°
200	300	100°



SWING GATES

SERIES R23




TECHNICAL SPECIFICATIONS	SET R23/374
Power:	230V AC 50Hz
Power rating:	200W
Max thrust:	400N
Frequency of use:	50%
Motor thermal protection:	150 C°
Operating temperature:	-20 C° +55 C°
Protection level:	IP 43
Opening time at 90°:	14 s
Limitswitch:	Microswitch in opening and closing
Encoder:	-

Dimensions

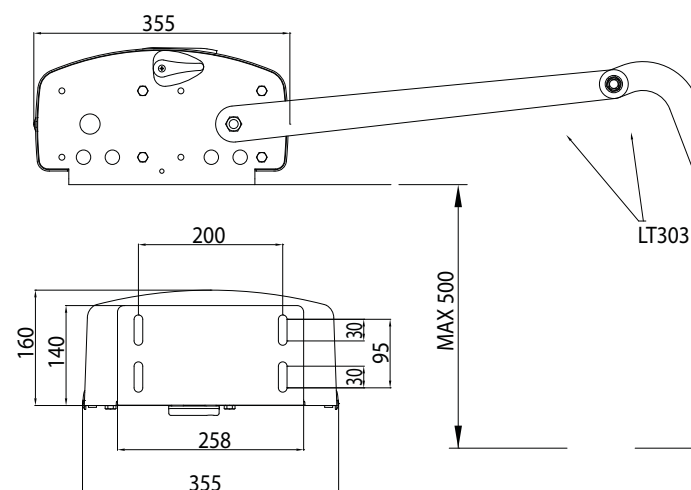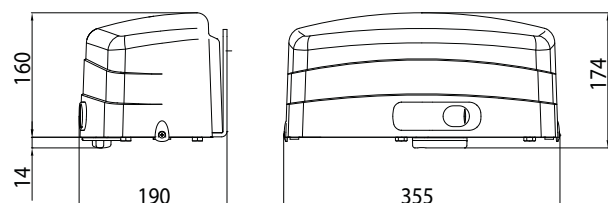

Predisposition for standard installation

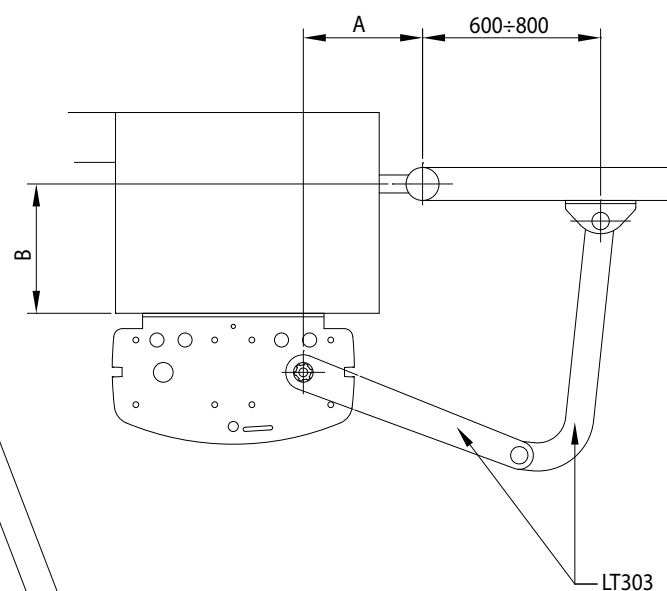

Usage limits





Table quotas

A	B	Angle
120	200	90°
150	120	100°
150	400	90°
200	100	105°
200	350	90°
200	500	90°
250	350	90°
250	450	90°

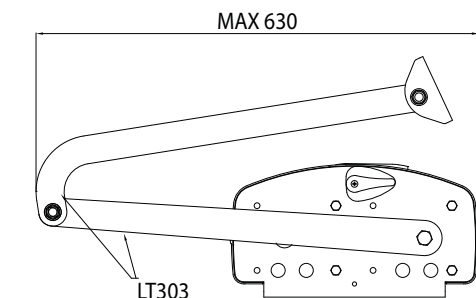


SWING GATES

SERIES H23




TECHNICAL SPECIFICATIONS	H23/282 SET H23/284
Power:	230V AC 50Hz
Power rating:	200W
Max thrust:	300N
Frequency of use:	50%
Motor thermal protection:	150 C°
Operating temperature:	-20 C° +55 C°
Protection level:	IP 43
Opening time at 90°:	12 s
Limitswitch:	Microswitch in opening and closing
Encoder:	Optical

Dimensions

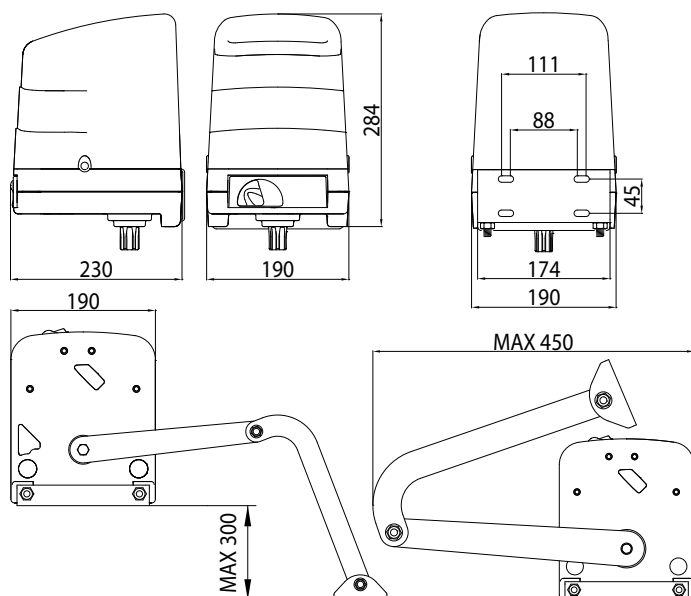

Predisposition for standard installation

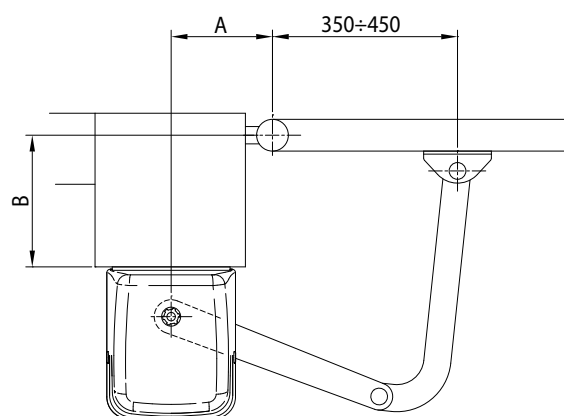

Usage limits











Table quotas

A	B	Angle
120	80	95°
120	300	90°
140	120	100°
160	160	100°
180	200	105°
200	80	115°
200	1250	105°
200	300	100°




SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 24V DC	SET M40/662D	Set of 2 guides lenght 3 meters complete with motor up to 650N, with two control units, with fixing support and accessories.		
				
				
COMPOSITION SET M40/662D				
	KIT M40/G3065M	2 guides lenght 3 meters series M40 complete with motor up to 650N.	1	
	KIT M40/655	KIT M40 Control unit 230V AC with support and accessories without motor for series guides M40. With radio control and radio receivers.	2	
Composition KIT M40/655				
	M40/654	Control unit 230V AC with support and accessories without motor for serie guides M40.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1	
Accessories	Code	Description		Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.		
	MC776	Kit mechanical stop for M40 and H40.		
	RL654	Kit for release from outside without handle.		
	RL655	Kit for release from outside with handle.		
	LT314	Pair of optional fixing brackets.		
	R99/C/001	Signboard Automatic Opening".		

SECTIONAL DOORS SERIES M40




Product	Code	Description	Pcs per Box.	Pcs/pallet
 NEW 	SET M40/662/HR	Set of 1 guide lenght 3 meters (divided in half) complete with motor up to 650N, with two control units, with fixing support and accessories.		
				
				
COMPOSITION SET M40/662/HR				
	M40/G3065M/H R	1 guide lenght 3 meters (divided in half) series M40 complete with motor up to 650N,	1	
	KIT M40/655	KIT M40 Control unit 230V AC with support and accessories without motor for series guides M40. With radio control and radio receivers.	1	
Composition KIT M40/655				
	M40/654	Control unit 230V AC with support and accessories without motor for serie guides M40.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1	
Accessories	Code	Description		Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.		
	MC776	Kit mechanical stop for M40 and H40.		
	RL654	Kit for release from outside without handle.		
	RL655	Kit for release from outside with handle.		
	LT314	Pair of optional fixing brackets.		
	R99/C/001	Signboard Automatic Opening".		

SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 24V DC	SET M40/635D	Set of 2 guides lenght 3,5 meters complete with motor up to 650N, with two control units, with fixing support and accessories.		
 				
COMPOSITION SET M40/635D				
	KIT M40/G3565M	2 guides lenght 3,5 meters series M40 complete with motor up to 650N	1	
	KIT M40/655	KIT M40 Control unit 230V AC with support and accessories without motor for series guides M40. With radio control and radio receivers.	2	
Composition KIT M40/655				
	M40/654	Control unit 230V AC with support and accessories without motor for serie guides M40.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1	

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 24V DC	SET M40/640D	Set of 2 guides lenght 4 meters complete with motor up to 650N, with two control units, with fixing support and accessories.		
 				
COMPOSITION SET M40/640D				
	KIT M40/G4065M	2 guides lenght 4 meters series M40 complete with motor up to 650N.	1	
	KIT M40/655	KIT M40 Control unit 230V AC with support and accessories without motor for series guides M40. With radio control and radio receivers.	2	
Composition KIT M40/655				
	M40/654	Control unit 230V AC with support and accessories without motor for serie guides M40.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1	

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

 **230V AC**  **24V DC** **M40/654**



Control unit 230V AC with support and accessories without motor for serie guides M40.

49



Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 230V AC  KIT M40/655		KIT M40 Control unit 230V AC with support and accessories without motor for series guides M40. With radio control and radio receivers.		49




COMPOSITION KIT M40/655

M40/654	Control unit 230V AC with support and accessories without motor for serie guides M40.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1

Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	



SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs/pallet
 24V DC KIT M40/G3065M		2 guides lenght 3 meters series M40 complete with motor up to 650N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs/pallet
 NEW  M40/G3065M/H R		1 guide lenght 3 meters (divided in half) series M40 complete with motor up to 650N,	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs/pallet
 24V DC	KIT M40/G3565M	2 guides lenght 3,5 meters series M40 complete with motor up to 650N	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES M40

Product	Code	Description	Pcs/pallet
 24V DC	KIT M40/G4065M	2 guides lenght 4 meters series M40 complete with motor up to 650N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	LT314	Pair of optional fixing brackets.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES H40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 24V DC	SET H40/672D	Set of 2 guides lenght 3 meters complete with motor up to 650N, with two control units, with fixing support and accessories.		




COMPOSITION SET H40/672D

KIT H40/G3065M	2 guides lenght 3 meters H40 series complete with motor up to 650N.	1
KIT H40/655	KIT H40 Control unit 230V AC with support and accessories without motor for series guides H40. With radio control and radio receivers.	2
Composition KIT H40/655		
H40/654	Control unit 230V AC with support and accessories without motor for series guides H40.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES H40



Product	Code	Description	Pcs per Box.	Pcs/pallet
 24V DC	SET H40/673D	Set of 2 guides lenght 4 meters complete with motor up to 650N, with two control units, with fixing support and accessories.		



COMPOSITION SET H40/673D				
KIT H40/G4065M	2 guides lenght 4 meters H40 series complete with motor up to 650N.	1		
KIT H40/655	KIT H40 Control unit 230V AC with support and accessories without motor for series guides H40. With radio control and radio receivers.	2		
Composition KIT H40/655				
H40/654	Control unit 230V AC with support and accessories without motor for series guides H40.	1		
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1		
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1		

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES H40

Product	Code	Description	Pcs/pallet
 230V AC  24V DC	H40/654	Control unit 230V AC with support and accessories without motor for series guides H40.	50



Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES H40

Product	Code	Description	Pcs per Box.	Pcs/pallet
 KIT H40/655		KIT H40 Control unit 230V AC with support and accessories without motor for series guides H40. With radio control and radio receivers.		50




COMPOSITION KIT H40/655

H40/654	Control unit 230V AC with support and accessories without motor for series guides H40.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	1

Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES H40

Product	Code	Description	Pcs/pallet
 KIT H40/G3065M		2 guides lenght 3 meters H40 series complete with motor up to 650N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES H40

Product	Code	Description	Pcs/pallet
 KIT H40/G4065M		2 guides lenght 4 meters H40 series complete with motor up to 650N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC776	Kit mechanical stop for M40 and H40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



24V DC

SET G40/1002 Set of 1 guide lenght 3 meters complete with motor up to 1000N, with control unit, with fixing support and accessories



COMPOSITION SET G40/1002

G40/G3100M 1 guide lenght 3 meters G40 series complete with motor up to 1000N. 1

KIT G40/1005 KIT G40 Control unit 230V AC with support and accessories without motor for series guide G40. With radio control and radio receivers. 1

Composition KIT G40/1005

G40/1004 1

Control unit 230V AC with support and accessories without motor for series guide G40.

H93/RX22A/I 1

Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.

E80/TX52R/2 1

Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



24V DC

SET G40/1035 Set of 1 guide lenght 3,5 meters complete with motor up to 1000N, with control unit, with fixing support and accessories.



COMPOSITION SET G40/1035

G40/G35100M 1 guide lenght 3,5 meters G40 series complete with motor up to 1000N. 1

KIT G40/1005 KIT G40 Control unit 230V AC with support and accessories without motor for series guide G40. With radio control and radio receivers. 1

Composition KIT G40/1005

G40/1004 1

Control unit 230V AC with support and accessories without motor for series guide G40.

H93/RX22A/I 1

Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.

E80/TX52R/2 1

Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs per Box.	Pcs/pallet
---------	------	-------------	--------------	------------



24V DC

SET G40/1003 Set of 1 guide lenght 4 meters complete with motor up to 1000N, with control unit, with fixing support and accessories.



COMPOSITION SET G40/1003

G40/G4100M 1 guide lenght 4 meters G40 series complete with motor up to 1000N. 1

KIT G40/1005 KIT G40 Control unit 230V AC with support and accessories without motor for series guide G40. With radio control and radio receivers. 1

Composition KIT G40/1005

G40/1004 1

Control unit 230V AC with support and accessories without motor for series guide G40.

H93/RX22A/I 1

Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.

E80/TX52R/2 1

Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.

Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs/pallet
G40/1004		Control unit 230V AC with support and accessories without motor for series guide G40.	30



Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs per Box.	Pcs/pallet
KIT G40/1005		KIT G40 Control unit 230V AC with support and accessories without motor for series guide G40. With radio control and radio receivers.		30



COMPOSITION KIT G40/1005

G40/1004 Control unit 230V AC with support and accessories without motor for series guide G40. 1

H93/RX22A/I Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL. 1

E80/TX52R/2 Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy. 1

Accessories	Code	Description	Pcs/pallet
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



24V DC

G40/G3100M 1 guide lenght 3 meters G40 series complete with motor up to 1000N.

36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs/pallet
 24V DC	G40/G35100M	1 guide lenght 3,5 meters G40 series complete with motor up to 1000N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	

SECTIONAL DOORS SERIES G40

Product	Code	Description	Pcs/pallet
 24V DC	G40/G4100M	1 guide lenght 4 meters G40 series complete with motor up to 1000N.	36



Accessories	Code	Description	Pcs/pallet
	LT324	Oscillating arm sliding on bearings for overhead and overflowing doors.	
	MC777	Kit mechanical stop for G40.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	R99/C/001	Signboard Automatic Opening".	


SECTIONAL DOORS

SERIES M40




TECHNICAL SPECIFICATIONS	SET M40/662D SET M40/662HR	SET M40/635D	SET M40/640D
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	200W
Max thrust:	650N	650N	650N
Frequency of use:	50%	50%	50%
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 40	IP 40	IP 40
Speed:	15 cm/s	15 cm/s	15 cm/s
Guide length AL:	3m	3,5m	4m
Maximum opening:	up to 2,3 m	up to 2,7 m	up to 3 m
Limitswitch:	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)
Encoder:	Magnetic	Magnetic	Magnetic
Onboard control unit	H70/14CC	H70/14CC	H70/14CC


Dimensions



Dimensions track section



Dimensions

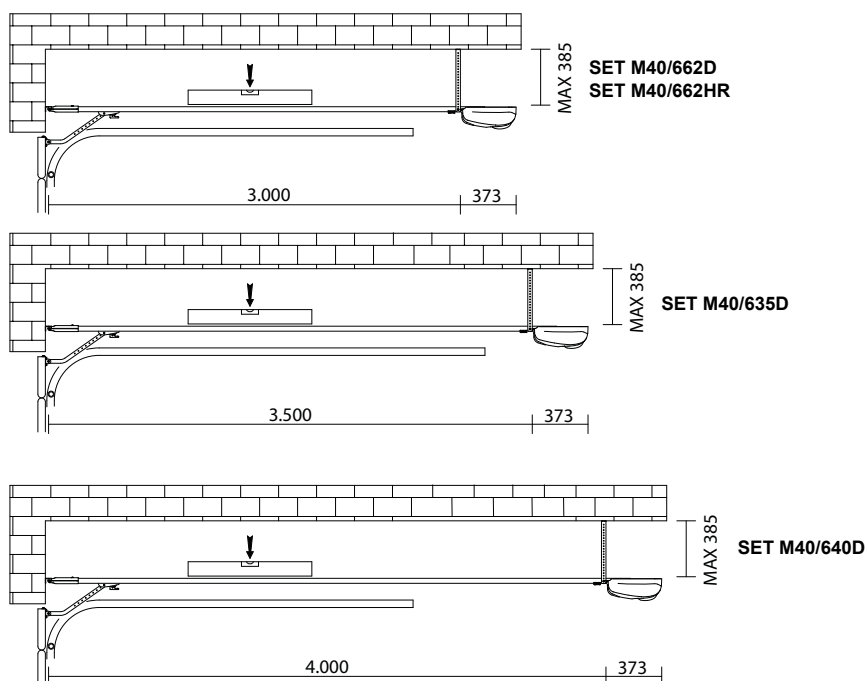


SECTIONAL DOORS

SERIES H40




TECHNICAL SPECIFICATIONS	SET H40/672D	SET H40/673D
Power:	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W
Max thrust:	650N	650N
Frequency of use:	50%	50%
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 40	IP 40
Speed:	15 cm/s	15 cm/s
Guide length AL:	3m	4m
Maximum opening:	up to 2,3 m	up to 3 m
Limitswitch:	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)
Encoder:	Magnetic	Magnetic
Onboard control unit	H70/10CC	H70/10CC



Dimensions

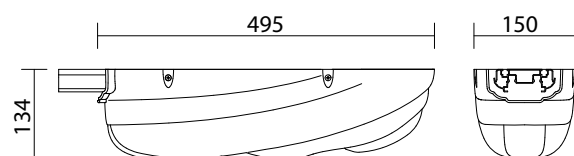

Dimensions track section



Dimensions

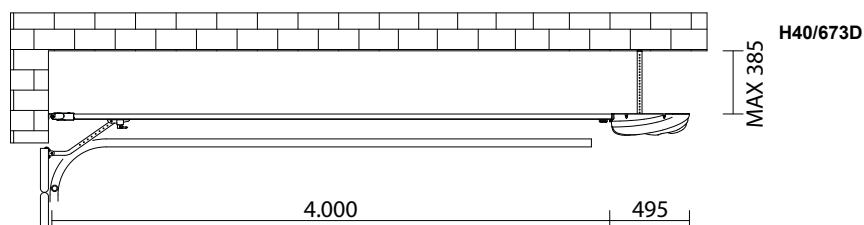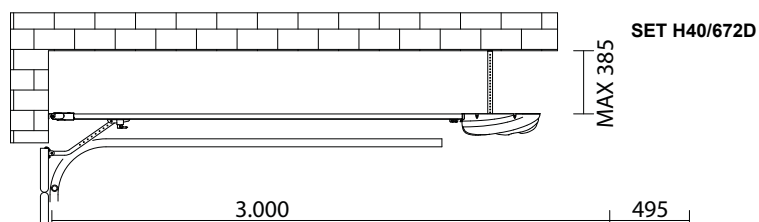


SECTIONAL DOORS

SERIES G40




TECHNICAL SPECIFICATIONS	SET G40/1002	SET G40/1035	SET G40/1003
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	200W
Max thrust:	1000N	1000N	1000N
Frequency of use:	50%	50%	50%
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 40	IP 40	IP 40
Speed:	low: 9 cm/s - standard: 12 cm/s - fast: 15 cm/s	low: 9 cm/s - standard: 12 cm/s - fast: 15 cm/s	low: 9 cm/s - standard: 12 cm/s - fast: 15 cm/s
Guide lengthAL:	3m	3,5m	4m
Maximum opening:	up to 2,3 m	up to 2,7 m	up to 3 m
Limitswitch:	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)
Encoder:	Magnetic	Magnetic	Magnetic
Onboard control unit	H70/11CC	H70/11CC	H70/11CC



Dimensions



Dimensions track section



Dimensions

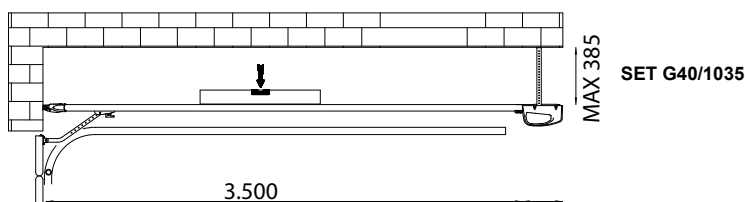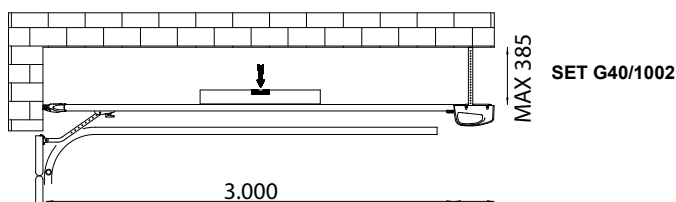

OVERHEAD DOORS SERIES R41

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

R41/830

Electromechanical motor 230V AC irreversible ideal for overhead doors up to 8 sm. Fast, without control unit and with mechanical limit switch.

50



Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

LT306

Pair of drive shafts L 200 mm complete with support.

LT307

Pair of drive shafts L 1500 mm complete with support.

LT308

Pair of drive shafts L 2000 mm complete with support.

LT321

Shaft support for R41 series.

LT304

Pair of short telescopic arms 600 mm with splined bushing and plate for welding on.

LT305

Pair of long telescopic arms 800 mm with splined bushing and plate for welding on.

LT309

Pair of short telescopic arms 600 mm with cylindrical bushing and plate for welding on.

LT310

Pair of long telescopic arms 800 mm with cylindrical bushing and plate for welding on.

LT311

Pair of short telescopic arms 600 mm with plate for welding on.

LT312

Pair of long telescopic arms 800 mm with plate for welding on.

LT313

Rough splined bushing for welding on.

LT322

Pair long curved telescopic arms 800 mm with cylindrical bushing and plate for welding on.

LT323

Pair long curved telescopic arms 800 mm with splined bushing and plate for welding on

RL653

Kit for release from outside with key and extension.

RL656

Kit for release from outside with key (variable key code).

RL657

Kit for release from outside without handle for R41 series.

RL662

Kit for release from outside with key (fixed key code KA3001).

KT216

Supporting plate L.619 mm for R41 series.

KT217

Fixing plate L.2000 mm for R41 series.

R99/C/001

Signboard Automatic Opening".

OVERHEAD DOORS SERIES R41

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



230V AC

R41/831

Electromechanical motor 230V AC irreversible ideal for overhead doors up to 8 sm. Fast, with control unit series H70 with slow down, encoder and mechanical limit switch.

50



H70/H04AC ON BOARD



Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

LT306

Pair of drive shafts L 200 mm complete with support.

LT307

Pair of drive shafts L 1500 mm complete with support.

LT308

Pair of drive shafts L 2000 mm complete with support.

LT321

Shaft support for R41 series.

LT304

Pair of short telescopic arms 600 mm with splined bushing and plate for welding on.

LT305

Pair of long telescopic arms 800 mm with splined bushing and plate for welding on.

LT309

Pair of short telescopic arms 600 mm with cylindrical bushing and plate for welding on.

LT310

Pair of long telescopic arms 800 mm with cylindrical bushing and plate for welding on.

LT311

Pair of short telescopic arms 600 mm with plate for welding on.

LT312

Pair of long telescopic arms 800 mm with plate for welding on.

LT313

Rough splined bushing for welding on.

LT322

Pair long curved telescopic arms 800 mm with cylindrical bushing and plate for welding on.

LT323

Pair long curved telescopic arms 800 mm with splined bushing and plate for welding on

RL653

Kit for release from outside with key and extension.

RL656

Kit for release from outside with key (variable key code).

RL657

Kit for release from outside without handle for R41 series.

RL662

Kit for release from outside with key (fixed key code KA3001).

KT216

Supporting plate L.619 mm for R41 series.


KT217

Fixing plate L.2000 mm for R41 series.

R99/C/001

Signboard Automatic Opening".


OVERHEAD DOORS SERIES R41

Product	Code	Description	Pcs/pallet
	R41/832	Electromechanical motor 230V AC irreversible ideal for overhead doors up to 8 sm. Slow, without control unit and with mechanical limit switch.	50



Accessories	Code	Description	Pcs/pallet
	LT306	Pair of drive shafts L 200 mm complete with support.	
	LT307	Pair of drive shafts L 1500 mm complete with support.	
	LT308	Pair of drive shafts L 2000 mm complete with support.	
	LT321	Shaft support for R41 series.	
	LT304	Pair of short telescopic arms 600 mm with splined bushing and plate for welding on.	
	LT305	Pair of long telescopic arms 800 mm with splined bushing and plate for welding on.	
	LT309	Pair of short telescopic arms 600 mm with cylindrical bushing and plate for welding on.	
	LT310	Pair of long telescopic arms 800 mm with cylindrical bushing and plate for welding on.	
	LT311	Pair of short telescopic arms 600 mm with plate for welding on.	
	LT312	Pair of long telescopic arms 800 mm with plate for welding on.	
	LT313	Rough splined bushing for welding on.	
	LT322	Pair long curved telescopic arms 800 mm with cylindrical bushing and plate for welding on.	
	LT323	Pair long curved telescopic arms 800 mm with splined bushing and plate for welding on.	
	RL653	Kit for release from outside with key and extension.	
	RL656	Kit for release from outside with key (variable key code).	
	RL657	Kit for release from outside without handle for R41 series.	
	RL662	Kit for release from outside with key (fixed key code KA3001).	
	KT216	Supporting plate L.619 mm for R41 series.	
	KT217	Fixing plate L.2000 mm for R41 series.	
	R99/C/001	Signboard Automatic Opening".	

OVERHEAD DOORS SERIES R41

Product	Code	Description	Pcs/pallet
	R41/833	Electromechanical motor 230V AC irreversible ideal for overhead doors up to 8 sm. Fast, with control unit series H70 with slow down, encoder and mechanical limit switch.	50

H70/104AC ON BOARD

Accessories	Code	Description	Pcs/pallet
	LT306	Pair of drive shafts L 200 mm complete with support.	
	LT307	Pair of drive shafts L 1500 mm complete with support.	
	LT308	Pair of drive shafts L 2000 mm complete with support.	
	LT321	Shaft support for R41 series.	
	LT304	Pair of short telescopic arms 600 mm with splined bushing and plate for welding on.	
	LT305	Pair of long telescopic arms 800 mm with splined bushing and plate for welding on.	
	LT309	Pair of short telescopic arms 600 mm with cylindrical bushing and plate for welding on.	
	LT310	Pair of long telescopic arms 800 mm with cylindrical bushing and plate for welding on.	
	LT311	Pair of short telescopic arms 600 mm with plate for welding on.	
	LT312	Pair of long telescopic arms 800 mm with plate for welding on.	
	LT313	Rough splined bushing for welding on.	
	LT322	Pair long curved telescopic arms 800 mm with cylindrical bushing and plate for welding on.	
	LT323	Pair long curved telescopic arms 800 mm with splined bushing and plate for welding on.	
	RL653	Kit for release from outside with key and extension.	
	RL654	Kit for release from outside without handle.	
	RL655	Kit for release from outside with handle.	
	RL656	Kit for release from outside with key (variable key code).	
	RL657	Kit for release from outside without handle for R41 series.	
	RL662	Kit for release from outside with key (fixed key code KA3001).	
	KT216	Supporting plate L.619 mm for R41 series.	
	KT217	Fixing plate L.2000 mm for R41 series.	



OVERHEAD DOORS

SERIES R41




TECHNICAL SPECIFICATIONS	R41/830	R41/831	R41/832	R41/833
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	180W	180W
Max thrust:	380N	380N	250N	250N
Frequency of use:	40%	40%	30%	30%
Motor thermal protection:	150 C°	150 C°	150 C°	150 C°
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 40	IP 40	IP 40	IP 40
Dimensione massima portata:	8 Mq	8 Mq	8 Mq	8 Mq
Limitswitch:	Microswitch in opening and closing	Microswitch in opening and closing	Microswitch in opening and closing	Microswitch in opening and closing
Encoder:	-	Optical	-	Optical
Onboard control unit	-	H70/104AC	-	H70/104AC



Dimensions

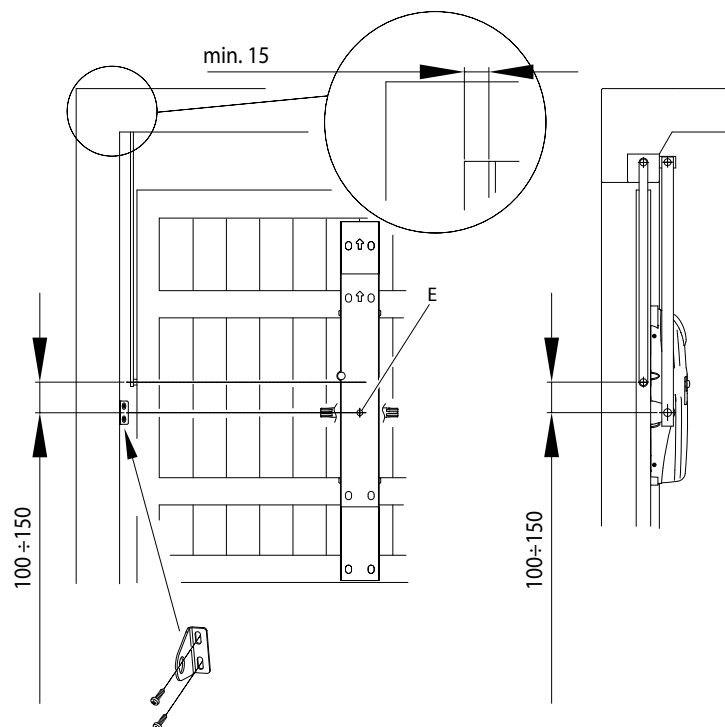

Predisposition for standard installation





CONTROL UNITS AND RADIO RECEIVERS SERIES H70/200AC

Product	Code	Description	Pcs/pallet
	H70/200AC/BO X	Control unit for 2 motors 230V AC with slow down, with plastic box.	
			


Accessories	Code	Description	Pcs/pallet
	H70/EL	Electric lock module 12V for control unit H70/200AC.	

CONTROL UNITS AND RADIO RECEIVERS SERIES H70/200AC



Product	Code	Description	Pcs/pallet
	H70/200AC	Control unit for 2 motors with terminal blocks 230V AC, without plastic box (spare part)	
			

Accessories	Code	Description	Pcs/pallet
	H70/EL	Electric lock module 12V for control unit H70/200AC.	

CONTROL UNITS AND RADIO RECEIVERS SERIES H70/200AC

Product	Code	Description	Pcs per Box.	Pcs/pallet	
<div><div>230V AC</div></div>	KIT H70/21	Electronic kit with control unit H70/200AC for two motors, with wall antenna and without flashing light.			
	COMPOSITION KIT H70/21				
	H70/200AC/BO X	Control unit for 2 motors 230V AC with slow down, with plastic box.	1		
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1		
	H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2		
	R90/F2ES	Pair of external photocells synchronized.	1		
	R91/AN1/P1	Antenna designed for wall mounting.	1		
	R99/C/001	Signboard "Automatic Opening"	1		
	Accessories	Code	Description		Pcs/pallet
		H70/EL	Electric lock module 12V for control unit H70/200AC.		

CONTROL UNITS AND RADIO RECEIVERS SERIES H70/200AC

Product	Code	Description	Pcs per Box.	Pcs/pallet
	KIT H70/22	Electronic kit with control unit H70/200AC for two motors, with E80/TX52R/2 remote control.		
				
COMPOSITION KIT H70/22				
	H70/200AC/BO X	Control unit for 2 motors 230V AC with slow down, with plastic box.	1	
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1	
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2	
	R90/F2ES	Pair of external photocells synchronized.	1	
	R92/LED230	LED flashing light series R92 230V AC.	1	
	R91/AN1/LR1	Antenna for flashing light R92 series	1	
	R99/C/001	Signboard "Automatic Opening"	1	

Accessories	Code	Description	Pcs/pallet
	H70/EL	Electric lock module 12V for control unit H70/200AC.	

CONTROL UNITS AND RADIO RECEIVERS SERIES R70/2AC

Product	Code	Description	Pcs/pallet
230V AC	R70/2AC/BOX	Control unit for 2 motors 230V AC, with plastic box.	



CONTROL UNITS AND RADIO RECEIVERS SERIES R70/2AC

Product	Code	Description	Pcs/pallet
230V AC	R70/2AC	Control unit for 2 motors with terminal blocks 230V AC, without plastic box (spare part)	



CONTROL UNITS AND RADIO RECEIVERS SERIES R70/2AC

Product	Code	Description	Pcs per Box.	Pcs/pallet
230V AC	KIT R70/10	Electronic kit with control unit R70/2AC for two motors.		



COMPOSITION KIT R70/10

R70/2AC/BOX	Control unit for 2 motors 230V AC, with plastic box.	1
R93/RX12A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series R70.	1
H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2
R90/F2ES	Pair of external photocells synchronized.	1
R92/LED230	LED flashing light series R92 230V AC.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard "Automatic Opening"	1

CONTROL UNITS AND RADIO RECEIVERS SERIES R70/2AC

Product	Code	Description	Pcs per Box.	Pcs/pallet
230V AC	KIT R70/11	Electronic kit with control unit R70/2AC for two motors, with wall antenna and without flashing light.		



COMPOSITION KIT R70/11

R70/2AC/BOX	Control unit for 2 motors 230V AC, with plastic box.	1
R93/RX12A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series R70.	1
H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	2
R90/F2ES	Pair of external photocells synchronized.	1
R91/AN1/P1	Antenna designed for wall mounting.	1
R99/C/001	Signboard "Automatic Opening"	1


CONTROL UNITS AND RADIO RECEIVERS SERIES H70/104AC - H70/105AC

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC


H70/104AC

Control unit for 1 motor 230V AC 50/60Hz with slow down. Installed on board in the series sliding gates and overhead doors.



CONTROL UNITS AND RADIO RECEIVERS SERIES H70/104AC - H70/105AC

Product	Code	Description	Pcs/pallet
230V AC	H70/105AC	Control unit for 1 motor 230V AC 50/60Hz with slow down. For universal use.	



CONTROL UNITS AND RADIO RECEIVERS SERIES H70/104AC - H70/105AC

Product	Code	Description	Pcs/pallet
NEW 230V AC	H70/105AC/BO X	Control unit for 1 motor 230V AC 50/60Hz with slow down. For universal use, in plastic box.	



CONTROL UNITS AND RADIO RECEIVERS SERIES R70/1AC

Product	Code	Description	Pcs/pallet
230V AC	R70/1AC	Control unit for 1 motor 230V AC 50/60Hz with standard function. For series sliding gates.	



CONTROL UNITS AND RADIO RECEIVERS SERIES H70/10CC - H70/11CC - H70/14CC

Product	Code	Description	Pcs/pallet
230V AC	H70/10CC	Control unit with terminal blocks for sectional door up to 650 N.	



CONTROL UNITS AND RADIO RECEIVERS SERIES H70/10CC - H70/11CC - H70/14CC

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

H70/11CC

Control unit with terminal blocks for sectional door up to 1000 N.



CONTROL UNITS AND RADIO RECEIVERS SERIES H70/10CC - H70/11CC - H70/14CC

Product	Code	Description	Pcs/pallet
230V AC	H70/14CC	Control unit with terminal blocks for sectional door up to 650 N, for series M40 only.	



CONTROL UNITS AND RADIO RECEIVERS SERIES H93

Product	Code	Description	Pcs/pallet
	H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	



CONTROL UNITS AND RADIO RECEIVERS SERIES H93

Product	Code	Description	Pcs/pallet
NEW	H93/RX2RC/I	Plug-in receiver rolling code 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	



CONTROL UNITS AND RADIO RECEIVERS SERIES R93

Product	Code	Description	Pcs/pallet
	R93/RX12A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series R70.	



CONTROL UNITS AND RADIO RECEIVERS SERIES R93

Product	Code	Description	Pcs/pallet
	R93/RX12A/U	Terminal receiver 2 channels 433,92 Mhz with plastic box.	




CONTROL UNITS AND RADIO RECEIVERS SERIES R93

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

230V AC

R93/RX14M/230 Modular receiver 4 channels 230V with plastic box.




Accessories	Code	Description	Pcs/pallet
	R93/MR/1B	Bistable self holding relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).	
	R93/MR/1M	Monostable relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24) .	
	R93/MR/1T	Timed relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).	

CONTROL UNITS AND RADIO RECEIVERS SERIES R93

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

24V DC


R93/RX14M/24 Modular receiver 4 channels 24V AC/DC with plastic box.



Accessories	Code	Description	Pcs/pallet
	R93/MR/1B	Bistable self holding relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).	
	R93/MR/1M	Monostable relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24) .	
	R93/MR/1T	Timed relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).	


CONTROL UNITS AND RADIO RECEIVERS

SERIES H70/200AC

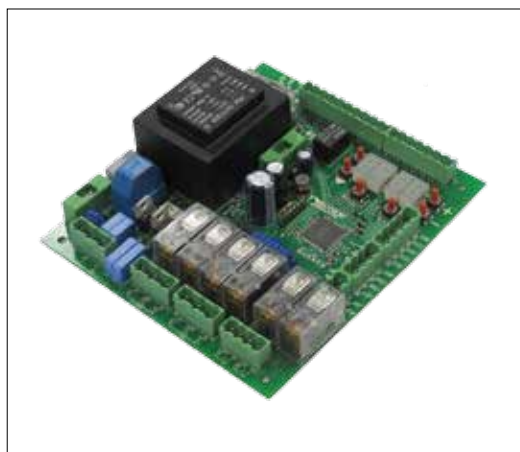


TECHNICAL SPECIFICATIONS	H70/200AC - H70/200AC/BOX KIT H70/21 - KIT H70/22
Power:	230V AC +/- 10% 50 Hz
Operating temperature:	-10+55 C°
Max flashing light charge:	40W (12-230V ac/dc)
N. motors activated:	2 asynchronous monophase
Max power per motor:	600W 230Vac
Max courtesy light charge:	100W (12-230V ac/dc)
Max power gate open light:	2W 24Vac
Max voltage accessories output:	350mA 24Vac (500mA 24Vcc)
Protection level:	IP54 (for version /BOX e KIT)

Dimensions H70/200AC



Dimensions H70/200AC/BOX - KIT H70/21 - KIT H70/22

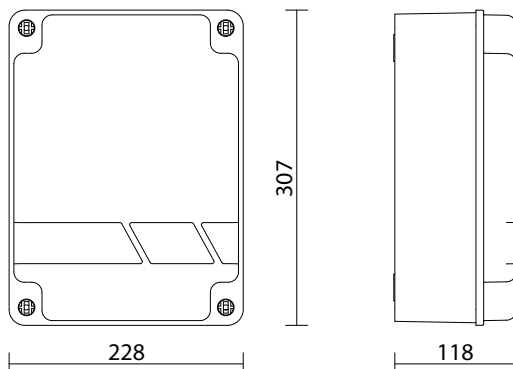


SERIES R70/2AC




TECHNICAL SPECIFICATIONS	R70/2AC - R70/2AC/BOX KIT R70/10 - KIT R70/11
Power:	230V AC +/- 10% 50 Hz
Operating temperature:	-10+55 C°
Max flashing light charge:	40W 230V ac
N. motors activated:	2 asynchronous monophase
Max power per motor:	400W 230V ac
Max courtesy light charge:	100W 230V ac
Max power gate open light:	2W 24V ac
Max voltage accessories output:	300mA 24Vac
Protection level:	IP54 (for version /BOX e KIT)

Dimensions R70/2AC



Dimensions R70/2AC/BOX - KIT R70/10 - KIT R70/11

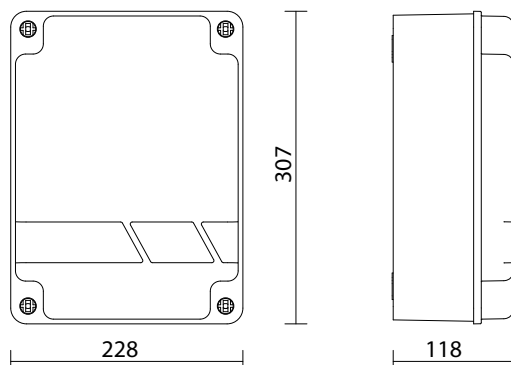


CONTROL UNITS AND RADIO RECEIVERS

SERIES H70/104AC - 105AC




TECHNICAL SPECIFICATIONS	H70/104AC - H70/105AC H70/105AC/BOX
Power:	230V AC +/- 10% 50/60 Hz
Operating temperature:	-10+55 C°
Max flashing light charge:	40W 230Vac - 25W 24Vac/dc
N. motors activated:	1 asynchronous monophase
Max power per motor:	600W 230V ac
Max courtesy light charge:	100W 230Vac - 25W 24Vac/dc
Max power gate open light:	2W 24V ac
Max voltage accessories output:	300mA 24Vac
Protection level:	IP54 (for version /BOX)

Dimensions H70/104AC - H70/105AC



Dimensions H70/105AC/BOX

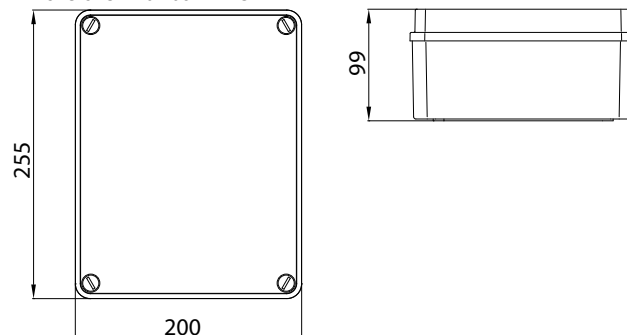


SERIES R70/1AC



TECHNICAL SPECIFICATIONS	R70/1AC
Power:	230V AC +/- 10% 50/60 Hz
Operating temperature:	-10+55 C°
Max flashing light charge:	40W 230V ac
N. motors activated:	1 asynchronous monophase
Max power per motor:	400W 230V ac
Max courtesy light charge:	100W 230V ac
Max power gate open light:	2W 24V ac
Max voltage accessories output:	300mA 24Vac

Dimensions R70/1AC




CONTROL UNITS AND RADIO RECEIVERS

SERIES H70/10CC - H70/11CC - H70/14CC



TECHNICAL SPECIFICATIONS	H70/10CC - H70/14CC	H70/11CC
Power:	230V AC +/- 10% 50/60 Hz	230V AC +/- 10% 50/60 Hz
Operating temperature:	-10+55 C°	-10+55 C°
Max flashing light charge:	40W 230V ac	40W 230V ac
N. motors activated:	1 motor 24V dc	1 motor 24V dc
Max power per motor:	200W	200W
Max courtesy light charge:	25W 24V	2 x 15W 24V
Max power gate open light:	2W 24V ac	2W 24V ac
Max voltage accessories output:	300mA 24Vac	300mA 24Vac
Thrust adjustment in opening/closing:	From 0 to 650 N	From 0 to 1000 N

Dimensions




SERIES H93



TECHNICAL SPECIFICATIONS	H93/RX22A/I	H93/RX2RC/I
Power:	5V dc	5V dc
Absorption:	15mA	18mA
Operating temperature:	-10+55 C°	-10+55 C°
Outputs:	Open Collector	Open Collector
Number of channels:	nr. 2	nr. 2
Codification:	Fix Code	Rolling Code
Modulation:	AM/ASK	AM/ASK
Carried frequency:	433,92 MHz	433,92 MHz
Storable codes:	500	250/1000
Sensibility:	-107 dBm	-107 dBm
Input impedance:	50 Ohm	50 Ohm

Dimensions




CONTROL UNITS AND RADIO RECEIVERS

SERIES R93




TECHNICAL SPECIFICATIONS	R93/RX12A/I R93/RX12A/U	R93/RX14M/230	R93/RX14M/24
Power:	12/24V ac/dc	230V ac	12/24V ac/dc
Absorption:	30mA	30mA	30mA
Operating temperature:	-10+55 C°	-10+55 C°	-10+55 C°
Outputs:	Relay	Relay	Relay
Number of channels:	nr. 2	nr. 4	nr. 4
Relay contacts max current:	0.5 A	0.5 A	0.5 A
Relay contacts max voltage:	24V ac/dc	24V ac/dc	24V ac/dc
Codification:	Fix Code	Fix Code	Fix Code
Modulation:	AM/ASK	AM/ASK	AM/ASK
Carried frequency:	433,92 MHz	433,92 MHz	433,92 MHz
Storable codes:	500	55/250	55/250
Sensibility:	-107 dBm	-107 dBm	-107 dBm
Input impedance:	50 Ohm	50 Ohm	50 Ohm
Protection level:	-	IP54	IP54


Dimensions R93/RX12A/I



Dimensions R93/RX12A/U

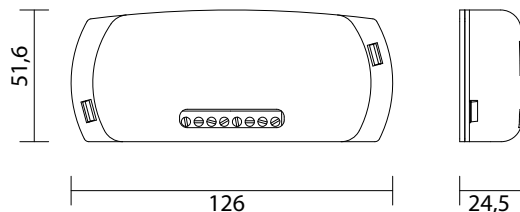

Dimensions R93/RX14M/230 - R93/RX14M/24

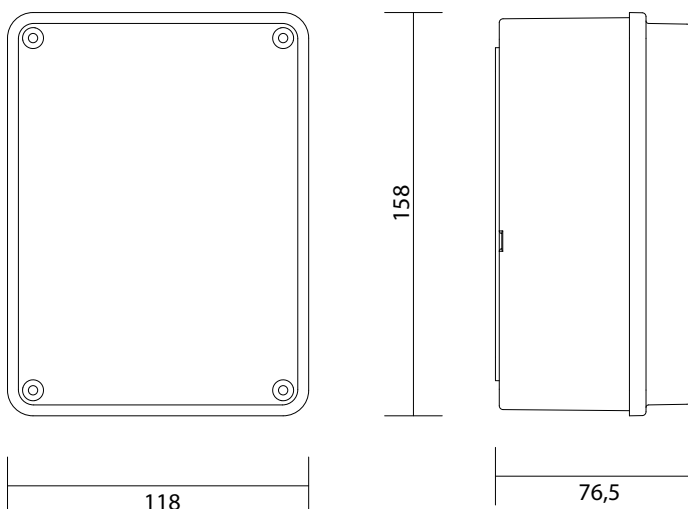

RADIO CONTROL SERIES E80

Product	Code	Description	Pcs/pallet
	E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	



RADIO CONTROL SERIES E80

Product	Code	Description	Pcs/pallet
	E80/TX54R/2	Fix code transmitter 433,92 Mhz. 4 channels, with radio for copy.	



RADIO CONTROL SERIES E80

Product	Code	Description	Pcs/pallet
NEW	E80/TX2R/RC	Rolling code transmitter 433,92 Mhz. 2 channels, with radio for copy.	



RADIO CONTROL SERIES E80

Product	Code	Description	Pcs/pallet
NEW	E80/TX4R/RC	Rolling code transmitter 433,92 Mhz. 4 channels, with radio for copy.	



RADIO CONTROL SERIES H80

Product	Code	Description	Pcs/pallet
	H80/TX22	Fix code transmitter 433,92 Mhz. 2 channels.	



RADIO CONTROL SERIES M80

Product	Code	Description	Pcs/pallet
	M80/TX44R	Fix code transmitter 433,92 Mhz. 4 channels, with radio for copy.	



RADIO CONTROL SERIES R80

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R80/TX102R Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.

RADIO CONTROL SERIES R80

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R80/TX104R Fix code transmitter 433,92 Mhz. 4 channels, with radio for copy.


RADIO CONTROL

SERIES E80



TECHNICAL SPECIFICATIONS	E80/TX52R/2	E80/TX54R/2	E80/TX2R/RC	E80/TX4R/RC
Power:	3V dc	3V dc	3V dc	3V dc
Absorption:	12mA	12mA	12mA	12mA
Maximum distance in open field:	150m	150m	150m	150m
Operating temperature:	-10+55 °C	-10+55 °C	-10+55 °C	-10+55 °C
Number of channels:	nr. 2	nr. 4	nr. 2	4
Codification:	Fix Code	Fix Code	Rolling Code	Rolling Code
Modulation:	AM/ASK	AM/ASK	AM/ASK	AM/ASK
Carried frequency:	433.92MHz	433.92MHz	433.92MHz	433.92MHz
Battery:	mod "CR2032" 3V	mod "CR2032" 3V	mod "CR2032" 3V	mod "CR2032" 3V
Number of combinations:	65.536	65.536	4.294.967.296	4.294.967.296
Radio for copy:	Yes	Yes	Yes - (Fix code + Rolling Code)	Yes - (Fix code + Rolling Code)

Dimensions




RADIO CONTROL

SERIES H80



TECHNICAL SPECIFICATIONS	H80/TX22
Power:	12V dc
Absorption:	18mA
Maximum distance in open field:	150m
Operating temperature:	-10+55 °C
Number of channels:	nr. 2
Codification:	Fix Code
Modulation:	AM/ASK
Carried frequency:	433.92MHz
Battery:	mod "23A" 12V
Number of combinations:	65.536
Radio for copy:	No

Dimensions




RADIO CONTROL

SERIES M80



TECHNICAL SPECIFICATIONS	M80/TX44R
Power:	3V dc
Absorption:	12mA
Maximum distance in open field:	150m
Operating temperature:	-10+55 °C
Number of channels:	nr. 4
Codification:	Fix Code
Modulation:	AM/ASK
Carried frequency:	433.92MHz
Battery:	mod "23A" 12V
Number of combinations:	65.536
Radio for copy:	Yes

Dimensions




RADIO CONTROL

SERIES R80




TECHNICAL SPECIFICATIONS	R80/TX102R	R80/TX104R
Power:	12V dc	12V dc
Absorption:	18mA	18mA
Maximum distance in open field:	150m	150m
Operating temperature:	-10+55 °C	-10+55 °C
Number of channels:	nr. 2	nr. 4
Codification:	Fix Code	Fix Code
Modulation:	AM/ASK	AM/ASK
Carried frequency:	433.92MHz	433.92MHz
Battery:	mod "23A" 12V	mod "23A" 12V
Number of combinations:	65.536	65.536
Radio for copy:	Yes	Yes


Dimensions




ACCESSORIES & SECURITY ANTENNAS

Product	Code	Description	Pcs/pallet
	R91/AN1/LR1	Antenna for flashing light R92 series	

ACCESSORIES & SECURITY ANTENNAS

Product	Code	Description	Pcs/pallet
	R91/AN1/P1	Antenna designed for wall mounting.	

ACCESSORIES & SECURITY FLASHING LIGHTS

Product	Code	Description	Pcs/pallet
	R92/LED24	LED flashing light series R92 24V.	

LED

Accessories	Code	Description	Pcs/pallet
	LED24	Board LED flashing light series R92 24V.	
	KT228	Fixing plate for flashing light R92 series.	

ACCESSORIES & SECURITY FLASHING LIGHTS

Product	Code	Description	Pcs/pallet
	R92/LED230	LED flashing light series R92 230V AC.	

LED

Accessories	Code	Description	Pcs/pallet
	LED230	Board LED flashing light series R92 230V AC.	
	KT228	Fixing plate for flashing light R92 series.	

ACCESSORIES & SECURITY FLASHING LIGHTS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

115V AC

R92/LR3

Flashing light 115V AC.



Accessories	Code	Description	Pcs/pallet
	KT228	Fixing plate for flashing light R92 series.	

ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
	R90/F2ES	Pair of external photocells synchronized.	



Accessories	Code	Description	Pcs/pallet
	CFT500	Pair of posts H 500 for series R90.	
	CFT501	Pair of posts H 1000 for series R90.	

ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
NEW	R90/F4ES	Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).	



ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
	G90/F2ES	Pair of external photocells synchronized.	



ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
	G90/F2ESI	Pair of built in photocells synchronized.	



Accessories	Code	Description	Pcs/pallet
	R85/60CI	Casing diameter 60mm for built in selectors and photocells. Pocket 6 pieces.	

ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

G90/F4ES

Pair of external photocells synchronized 24V AC/DC up to 4 pair.



ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



M90/F2ES

Pair of synchronized photocells series M90 Slim fix version.

ACCESSORIES & SECURITY PHOTOCELLS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



M90/F2ESO

Pair of synchronized photocells series M90 adjustable version.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60ES

External selector with standard cylinder.

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED

Light LED for series R85 selector.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60EAS

External selector made in aluminium with standard cylinder.

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED

Light LED for series R85 selector.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60EAE

External selector made in aluminium with European cylinder.

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED

Light LED for series R85 selector.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60IS Built in selector diameter 60mm with standard cylinder.

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED Light LED for series R85 selector.

R85/60CI Casing diameter 60mm for built in selectors and photocells. Pocket 6 pieces.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60IAS Built in selector made in aluminium diametro 60mm with standard cylinder

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED Light LED for series R85 selector.

R85/60CI Casing diameter 60mm for built in selectors and photocells. Pocket 6 pieces.

ACCESSORIES & SECURITY KEY SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R85/60IAE Built in selector diameter 60mm made in aluminium with European cylinder.

Accessories	Code	Description	Pcs/pallet
-------------	------	-------------	------------

R85/60EI/LED Light LED for series R85 selector.

R85/60CI Casing diameter 60mm for built in selectors and photocells. Pocket 6 pieces.

ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/TDS/E Keypad selector with 12 digit numbers, 4 channel, external.



ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/TDS/I Keypad selector with 12 digit numbers, 4 channel, built-in.



ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/TDR/E

Radio Keypad selector with 12 digit numbers. 4 channel, external, for rolling code and fix code transmission.



ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/TDR/I

Radio Keypad selector with 12 digit numbers, 4 channel, built-in, for rolling code and fix code transmission.



ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/DEC/BOX

4 channels decoder card for H85/TDS/E - H85/TDS/I with plastic box.



ACCESSORIES & SECURITY KEYPAD SELeCTORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

NEW

H85/DEC

4 channels decoder card for H85/TDS/E - H85/TDS/I.



ACCESSORIES & SECURITY SIGNBOARDS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

R99/C/001

Signboard "Automatic Opening"




ACCESSORIES & SECURITY

SERIES R91




TECHNICAL SPECIFICATIONS	R91/AN1/LR1 R91/AN1/P1
Tuning frequency:	433.92 MHz

Dimensions R91/AN1/LR1



Dimensions R91/AN1/P1




SERIES R92



TECHNICAL SPECIFICATIONS	R92/LED24	R92/LED230	R92/LR3
Power:	24V ac/dc +/- 10%	230V ac +/- 10% 50Hz	115V ac
Max flashing light charge:	13W	10W	40W
Type of light:	9 LED	9 LED	Light bulb E14
Protection level:	IP44	IP44	IP44
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Modulation:	1Hz (with option fixed light)	1Hz (with option fixed light)	1Hz

Dimensions

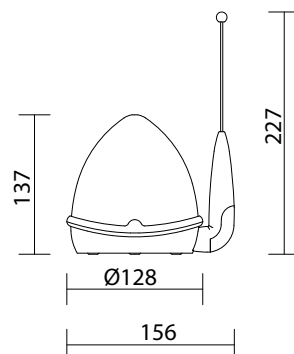


ACCESSORIES & SECURITY

SERIES R90



TECHNICAL SPECIFICATIONS	R90/F2ES	R90/F4ES
Power:	12/24V ac 50Hz - 12/24V dc	24V ac 50Hz - 24V dc
Absorption:	TX 19mA - RX=20mA	TX 18 mA - RX 27 mA
Maximum distance in open field:	10 - 15 m	10 - 15 m
Relay contacts max current:	0,5A RX	0,5A RX
Relay contacts max voltage:	30V	30V
Protection level:	IP55	IP55
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Orientation angle:	-	-
Maximum number of photocells synchronized:	nr. 2	nr. 4
Installation Type:	External	External

Dimensions

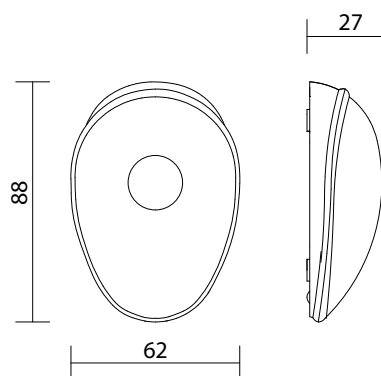


SERIES G90




TECHNICAL SPECIFICATIONS	G90/F2ES	G90/F2ESI	G90/F4ES
Power:	12/24V ac 50Hz - 12/24V dc	12/24V ac 50Hz - 12/24V dc	24V ac 50Hz - 24V dc
Absorption:	TX 19mA - RX=20mA	TX 19mA - RX=20mA	TX 18 mA - RX 27 mA
Maximum distance in open field:	10 - 15 m	10 - 15 m	10 - 15 m
Relay contacts max current:	0,5A RX	0,5A RX	0,5A RX
Relay contacts max voltage:	30V	30V	30V
Protection level:	IP55	IP55	IP55
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Orientation angle:	-	-	-
Maximum number of photocells synchronized:	nr. 2	nr. 2	nr. 4
Installation Type:	External	Built-in	External

Dimensions G90/F2ES - G90/F4ES

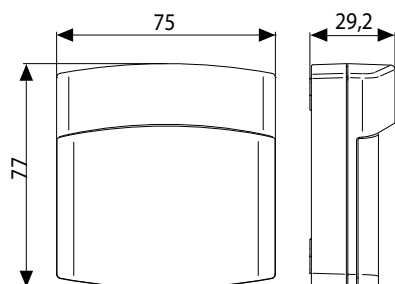

Dimensions G90/F2ESI

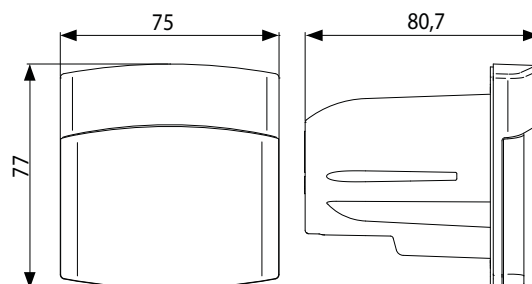

ACCESSORIES & SECURITY

SERIES M90






TECHNICAL SPECIFICATIONS	M90/F2ES	M90/F2ESO
Power:	12/24V ac 50Hz - 12/24V dc	24V ac 50Hz - 24V dc
Absorption:	TX 19mA - RX=20mA	TX 18 mA - RX 27 mA
Maximum distance in open field:	10 - 15 m	10 - 15 m
Relay contacts max current:	0,5A RX	0,5A RX
Relay contacts max voltage:	30V	30V
Protection level:	IP55	IP55
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°
Orientation angle:	-	210° horizontal - 15° vertical
Maximum number of photocells synchronized:	nr. 2	nr. 2
Installation Type:	External	External

Dimensions M90/F2ES



Dimensions M90/F2ESO

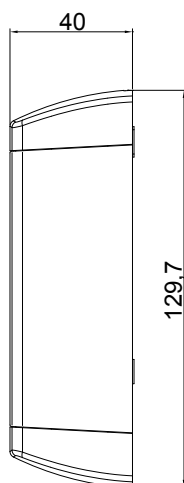


ACCESSORIES & SECURITY

SERIES R85




TECHNICAL SPECIFICATIONS	R85/60ES	R85/60EAS	R85/60EAE	R85/60IS	R85/60IAS	R85/60IAE
Cylinder:	Standard	Standard	European-DIN	Standard	Standard	European-DIN
Protection level:	IP54	IP54	IP54	IP54	IP54	IP54
Voltage and current contacts:	24V 1A	24V 1A	24V 1A	24V 1A	24V 1A	24V 1A
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Installation Type:	External	External	External	Built-in	Built-in	Built-in
Material:	Abs	Aluminum	Aluminum	Abs	Aluminum	Aluminum

Dimensions R85/60ES - R85/60EAS - R85/60EAE

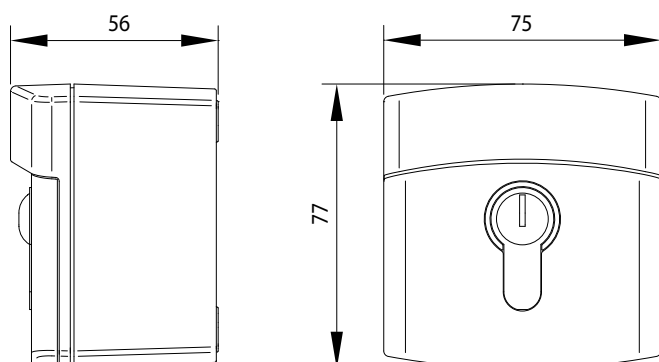

Dimensions R85/60IS - R85/60IAS - R85/60IAE

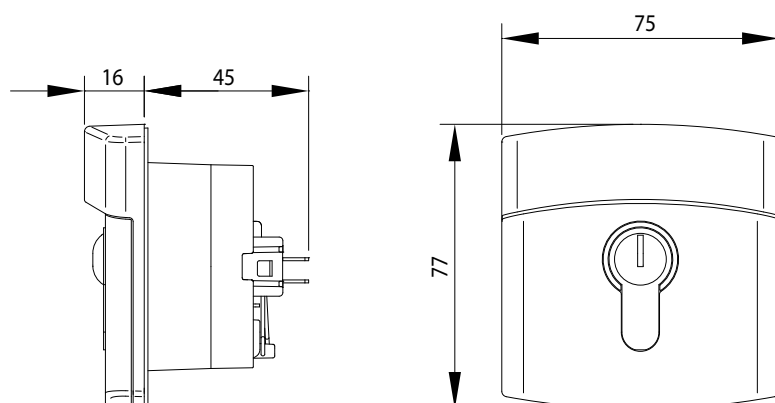


ACCESSORIES & SECURITY

SERIES H85




TECHNICAL SPECIFICATIONS	H85/TDS/E	H85/TDS/I
Power:	(decoder) 24 Vac-dc; 12 Vdc	(decoder) 24 Vac-dc; 12 Vdc
Operating temperature:	-10°C + 55°C	-10°C + 55°C
Protection level:	IP54	IP54
Absorption:	20mA	20mA
Number of users codes storable:	500	500
Maximum number of digits per user code:	nr. 6	nr. 6
Minimum number of digits per user code:	nr. 3	nr. 3
Maximum number of wired keyboard:	nr. 4	nr. 4
Number of outputs available:	4 of command; 1 of alarm	4 of command; 1 of alarm
Type of enable outputs:	Deadman (continue until you release the key)	Deadman (continue until you release the key)
Type of output:	Relay, pure contact	Relay, pure contact
Maximum power commutable (except light bulbs):	60VA/24W - 1A	60VA/24W - 1A
Delay on relay activation:	100ms	100ms
Maximum length cable from interface to keyboard:	100m (two-wire section cable 0.5mm2)	100m (two-wire section cable 0.5mm2)
Backlight keyboard:	6 white LEDs, two levels of intensity	6 white LEDs, two levels of intensity
Installation Type:	External	Built-in

Dimensions H85/TDS/E

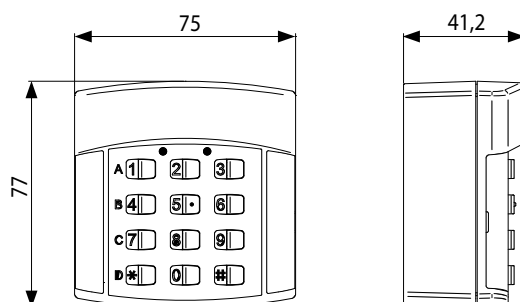

Dimensions H85/TDS/I

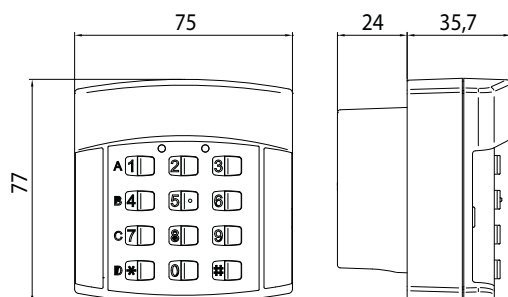


ACCESSORIES & SECURITY

SERIES H85




TECHNICAL SPECIFICATIONS	H85/TDR/E	H85/TDR/I
Operating temperature:	-10°C +55°C	-10°C +55°C
Protection level:	IP54	IP54
Modulation:	AM/ASK	AM/ASK
Carried frequency:	433.92 Mhz	433.92 Mhz
Codification:	Fix Code + Rolling Code	Fix Code + Rolling Code
Number of combinations:	65536 (Fix Code) - 4.294.967.296 (rolling code)	65536 (Fix Code) - 4.294.967.296 (rolling code)
Numero di bit del codice identificativo:	16 (Fix Code) - 32 (rolling code)	16 (Fix Code) - 32 (rolling code)
Numero bit trasmessi:	28 (Fix Code) - 144 (rolling code)	28 (Fix Code) - 144 (rolling code)
Battery:	2 x CR2032	2 x CR2032
Durata Battery:	Minimum 2 years with 10 activations / day	Minimum 2 years with 10 activations / day
Number of users codes storable:	450	450
Maximum number of digits per user code:	nr. 6	nr. 6
Minimum number of digits per user code:	nr. 3	nr. 3
Battery life with keypad active:	12 mA	12 mA
Backlight keyboard:	-	-
Installation Type:	External	Built-in

Dimensions H85/TDR/E

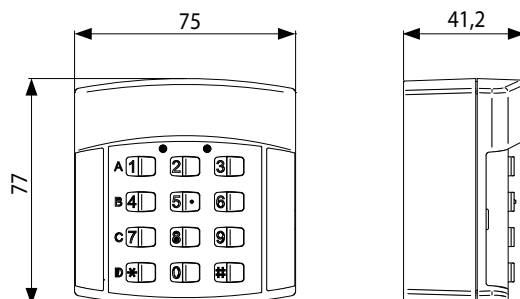

Dimensions H85/TDR/I

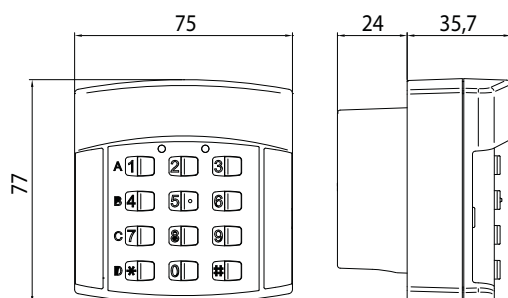


ACCESSORIES & SECURITY


SERIES H85



Dimensions H85/DEC



Dimensions H85/DEC/BOX

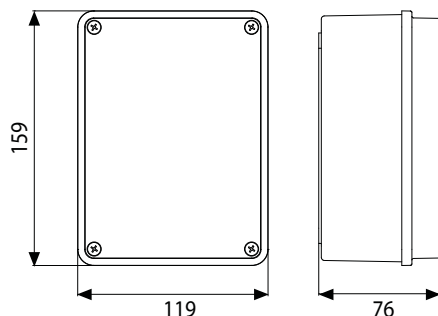


TECHNICAL SPECIFICATIONS	H85/DEC - H85/DEC/BOX
Power:	24 Vac-dc; 12 Vdc
Absorption:	40mA keypad + decoder (50mA wit relay active)
Number of users codes storable:	tot. 500
Maximum number of digits per user code:	nr. 6
Minimum number of digits per user code:	nr. 3
Maximum number of wired keyboard:	nr. 4
Number of outputs available:	4 of command; 1 of alarm
Type of enable outputs:	Deadman (continue until you release the key)
Type of output:	Relay, pure contact
Maximum power commutable (except light bulbs):	60VA/24W
Delay on relay activation:	100ms
Maximum length cable from interface to keyboard:	100m (two-wire section cable 0.5mm ²)
Protection level:	IP54 (for version /BOX)

ACCESSORIES

- SHAFTS
- ARTICULATED ARMS
- TELESCOPIC ARMS
- MOUNTING BASES
- FOUNDATION BOXES
- PLASTIC BOX
- COLUMNS PHOTOCELLS
- STANDARD ACCESSORIES
- RACKS
- LIMIT SWITCH
- KIT MECHANICAL STOPPERS
- KIT EXTERNAL RELEASE
- OPENING LEVER 125° - 360°
- SECURITY MICROSWITCH
- FLUSH MOUNTING BOXES
- ENCODER CARDS
- FLASHLIGHT CARDS
- EXPANSION MODULES
- ELECTRIC LOCK MODULES
- MOUNTING BRACKETS
- RELEASE SYSTEM
- SIGNING BOARDS

TRANSMISSION SHAFTS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT306

Pair of drive shafts L 200 mm complete with support.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT307

Pair of drive shafts L 1500 mm complete with support.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT308

Pair of drive shafts L 2000 mm complete with support.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT321

Shaft support for R41 series.

ARTICULATED ARMS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT302

Arms short for articulated motor.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT303

Arms long for articulated motor.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT317

Arm straight short for articulated motor.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT318 Arm curved short for articulated motor.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT319 Arm straight long for articulated motor.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT320 Arm curved long for articulated motor.



OSCILLATING ARM FOR OVERHEAD DOORS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT324 Oscillating arm sliding on bearings for overhead and overflowing doors.



TELESCOPE ARMS


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT304 Pair of short telescopic arms 600 mm with splined bushing and plate for welding on.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT305 Pair of long telescopic arms 800 mm with splined bushing and plate for welding on.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT309 Pair of short telescopic arms 600 mm with cylindrical bushing and plate for welding on.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

LT310 Pair of long telescopic arms 800 mm with cylindrical bushing and plate for welding on.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT311 Pair of short telescopic arms 600 mm with plate for welding on.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT312 Pair of long telescopic arms 800 mm with plate for welding on.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT313 Rough splined bushing for welding on.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT322 Pair long curved telescopic arms 800 mm with cylindrical bushing and plate for welding on.


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT323 Pair long curved telescopic arms 800 mm with splined bushing and plate for welding on.

FIXING BASE

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



KT210 Fixing plate with stay bolts and screws for R30 series.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



KT211 Pair of side angles bars complete with screws.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



KT212 Raised fixing plate for R30 series.


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT213 Fixing plate and angles bars kit for R30 series.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT214 Fixing plate with stay bolts and screws H30 series.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT214/SC Adapter plate with stay bolts and screws H30 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT215 Fixing plate with stay bolts and screws G30 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT220 Raised fixing plate for M30 series.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT221 Raised fixing plate for H30 series.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT222 Raised fixing plate for G30 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT223 Fixing plate with stay bolts and screws M30 series.



FOUNDATION BOXES

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU100 Cold galvanised foundation box and lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU101 Hot galvanised foundation box and lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




FU102 Hot galvanised foundation box and inox lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




FU103 Inox AISI 304 foundation box and lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU300DX Right foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU300SX Left foundation box for H21/300 made in steel with cataphoresis finishing and galvanised lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




FU500DX Right foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU500SX Left foundation box for H21/500 made in steel with cataphoresis finishing and galvanised lid.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



FU800 Cold galvanised foundation box series E30.

PHOTOCELLS COLUMNS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

CFT500

Pair of posts H 500 for series R90.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

CFT501

Pair of posts H 1000 for series R90.



STANDARD ACCESSORIES BOX

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT207


Standard installation accessories series R21.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT218

Gate pull bracket for series articulated.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT226

Standard installation accessories series H21/300.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT227

Standard installation accessories series H21/500



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT229

Standard installation accessories series R21 (FU103 INOX).



PLASTIC BOX

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

HT400 Plastic box for control unit R70/2AC and H70/200AC.

100



Product	Code	Description	Pcs/pallet
	HT401	Plastic box for radio receiver R93/RX12A/U.	



Product	Code	Description	Pcs/pallet
	HT411	Plastic box for control unit B70/2DC.	100



RACK


Product	Code	Description	Pcs/pallet
	GA550	Galvanised steel rack 22x22x1000 module 4.	



Product	Code	Description	Pcs/pallet
	GA551	Galvanised steel rack 30x12x1000 module 4 with spacers and screws.	



Product	Code	Description	Pcs/pallet
	GA553	Nylon rack module 4 with 6 connectors L.1000.	




Product	Code	Description	Pcs/pallet
	GA554	Pocket of 6 spacers and screws.	




LIMIT SWITCH

Product	Code	Description	Pcs/pallet
	MC751	Mechanical limitswitch for control unit R70/1AC.	




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC752 Kit mechanical limit switch for control unit R70/1AC.


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC753 Magnetic limit switch for control unit R70/1AC.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC754 Kit magnetic limit switch for control unit R70/1AC.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC755 Pairs of clips for mechanical limit switch.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC756 Pairs of magnets for magnetic limit switch.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC758 Mechanical limit switch for H70/100AC & series M30.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC759 Kit mechanical limit switch for H70/100AC & series M30.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC760 Magnetic limit switch for H70/100AC & series M30.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

MC761 Kit Magnetic limit switch for H70/100AC & series M30.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC762 Mechanical limit switch for control unit H70/100AC - H70/105AC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




MC763 Kit Mechanical limit switch for control unit H70/100AC - H70/105AC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC764 Magnetic limit switch for control unit H70/100AC - H70/105AC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC765 Kit magnetic limit switch for control unit H70/100AC - H70/105AC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




MC770 Kit optional microswitch in closing with cable series R20.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC772 Mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------




MC773 Kit mechanical limit switch for control unit H70/103AC, H70/104AC and B70/1DC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC774 Magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC775 Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC778 Kit optional 2° limit switch series M20.

MECHANICAL STOPPER KIT

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC776 Kit mechanical stop for M40 and H40.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC777 Kit mechanical stop for G40.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC779 Kit mechanical stop for M20 - G20 - H20 series.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC780 Kit mechanical stop R20 series.


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC781 Kit mechanical stop BR20 series, R20/300MS and R20/500MS.

EXTERNAL STOPPER KIT

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL653 Kit for release from outside with key and extension.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL654 Kit for release from outside without handle.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL655 Kit for release from outside with handle.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL656 Kit for release from outside with key (variable key code).

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL657 Kit for release from outside without handle for R41 series.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



RL662 Kit for release from outside with key (fixed key code KA3001).


OPENING LEVERS 125°-360°

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT300 Levers for opening up to 125°.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT301 Levers for opening up to 360°.

SECURITY MICROSWITCH

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



MC771 Safety micro switch for control unit H70/103AC, H70/104AC and B70/1DC.

ADD MODULS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

R93/MR/1B Bistable self holding relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).




Product	Code	Description	Pcs/pallet
	R93/MR/1M	Monostable relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24) .	



Product	Code	Description	Pcs/pallet
	R93/MR/1T	Timed relay module for radio receiver at 4 channel (R93/RX14M/230 - R93/RX14M/24).	



Product	Code	Description	Pcs/pallet
	R85/60EI/LED	Light LED for series R85 selector.	




ELECTROLOCKER MODULE

Product	Code	Description	Pcs/pallet
	H70/EL	Electric lock module 12V for control unit H70/200AC.	



FIXING BOX

Product	Code	Description	Pcs/pallet
	R85/60CI	Casing diameter 60mm for built in selectors and photocells. Pocket 6 pieces.	



ELECTRICAL PARTS FOR FLASHING LIGHT

Product	Code	Description	Pcs/pallet
	LED24	Board LED flashing light series R92 24V.	



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LED230 Board LED flashing light series R92 230V AC.

UNLOCK SYSTEMS

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL650 Release system with standard lever.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL651 Release system with european cylinder key.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL652 Standard release lever for underground.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL663 Long release lever for underground.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL730 Lever release system for underground H21/300.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

RL750 Lever release system for underground H21/500.



FIXING CLAMP


Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT201 Long front hinge plate.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT202 Short front hinge plate.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT203 Long rear hinge plate.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT204 Short rear hinge plate.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT205 Kit 3 hinge plates long series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT206 Kit 3 hinge plates short series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT208 Plate for fixing to post R23 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT209 Plate for fixing to post H23 series.




Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT216 Supporting plate L.619 mm for R41 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------

KT217 Fixing plate L.2000 mm for R41 series.



Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



KT228 Fixing plate for flashing light R92 series.

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



LT314 Pair of optional fixing brackets.

SIGN BOARD

Product	Code	Description	Pcs/pallet
---------	------	-------------	------------



R99/C/001 Signboard Automatic Opening".

INTERNATIONAL GENERAL SALES TERMS PRICE LIST 2015

INTRODUCTION TO CONDITIONS

These conditions of sale supersede all previous conditions and are automatically applied to all orders and order confirmations that the customer concludes for Roger Technology brand products or any other trademark owned by Roger Technology. All sales to the client are governed by these conditions of sale being integral part of the sale agreement and supersede and cancel any contrary or different or special agreement clause contained in the order or other document by the client. Roger Technology reserves the right to make any changes without notice aimed at functional improvement and quality of its products.

ORDERS

All orders are subject to their availability and various technical modifications or production. Roger Technology reserves the right to accept or not, all or part of the customer orders on the basis of their conformity or otherwise of these terms and conditions and availability of required products. Roger Technology reserves the right to make technical or production modifications at any time to products without customers making any claims.

PRICE LIST

The products are sold by Roger Technology in reference to the price list in force at the time of confirmation of order and its delivery. The customer agrees to accept unreservedly any changes in the price list that took place between the order and delivery of the product. The current price list supersedes all previous price lists. All list prices are quoted ex-factory (ex works) excluding VAT. The information and prices contained in this price list may change at any time at the sole discretion and decision of Roger Technology.

TERMS OF DELIVERY

All products are delivered ex factory Roger Technology S.r.l. at the plant in S. Botticelli, 8-31021 - Bonisiolo di Mogliano Veneto - TV - Italy. All delivery times refer exclusively to those indicated on order confirmations to be understood tentatively and with no obligation, and any delay does not entitle the customer to request the termination of all or any part of the contract, to refuse delivery or to claim damages. The delivery obligation is satisfied by written notice by Roger Technology to the client with a "products ready for shipment". Roger Technology S.r.l. reserves the right to extend the delivery terms or to terminate the supply agreement without any obligation of compensation in all cases of force majeure such as weather, earthquakes, strikes, fires, the impossibility of procurement of raw material, incorrect reporting or delay by the customer in the transmission of information necessary for order and failure to comply with terms of payment by the customer or any other event beyond our control.

SHIPPING AND PRODUCT RECALL

The delivery is carried out through written communication to the Reseller with a "products ready for shipment". Transportation costs and the cost of insurance if applicable are therefore charged to the customer. In the event that, by virtue of a specific agreement, the Manufacturer is responsible to provide for the transportation of products to the warehouse of the client, or to other destinations indicated by the reseller, the costs will be charged to the customer resulting in invoices attached to orders including the insurance costs of the Product, unless the customer does not declare in writing that one does not intend to insure the goods, taking upon himself all risks.

The customer is obliged to collect the goods as soon as they have been made available to him through communication of "products ready for shipment" or any other type of activity or communication. In case of delay in the collection of the Products by the customer, Roger Technology will have the right not just to ask for full payment of the price but also the reimbursement of storage or parking excluding damages compensation. From the notice of "products ready for shipment" the risk for each fortuitous event is transferred to the customer.

WARRANTY

All products in the price list are carefully checked and tested by Roger Technology thanks to its internal business model. Roger Technology guarantees all of its branded products Roger Technology or any other own brand against defects of material used or manufactured in accordance with the installation and use conditions & limits specified by Roger Technology. The Roger Technology warranty period offered to customers is 36 months for the mechanical and electrical part and 24 months for all the electronic parts, from the date of manufacturing of each Roger Technology brand product or any other own mark in accordance with current regulations to protect consumers.

The warranty is limited solely to the total or partial repair or replacement of the product considered faulty in the opinion of the internal Customer Service of Roger Technology, excluded, therefore, from the warranty is any preconception, expense or damage of any kind incurred by the customer. In no event is Roger Technology responsible for problems resulting from the incorrect installation of the products. It is absolutely understood that all products that are replaced, during repair activities remain the property of Roger Technology. All installations by the customer must be made with the full knowledge and technical skills needed and appropriate to carry out the installation in a workmanlike manner observing correctly all the mounting and electrical connection instructions in accordance with applicable laws in force at the time of the installation.

Roger Technology assumes no liability in the event of non-compliance with mounting and electrical connection instructions or electrical regulations and other specific rules in force at the time of the installation, especially in cases where mechanical or electrical accessories or components of Roger Technology are installed, used and connected without a careful observance of schemes and types of connection for which were designed. At the same time Roger Technology assumes no liability for the use or application of the products for purposes that are not appropriate to the nature, scope and level of ability.

Roger Technology assumes no responsibility in the event of connection, association, or interaction of its products with others not supplied by Roger Technology. In fact, the customer is required to apply Roger Technology products only in combination with other brand products of Roger Technology. Otherwise, the warranty will not be valid, this also applies if the user fails to report the defect within the time allowed or if the parts returned as defective, have been tampered with or otherwise repaired

COMPLAINTS AND PRODUCT DEFECTS

Any claims for merchandise shortages or failures or defects visible from external inspection of packages should be detected as soon as the goods are received and communicated to Roger Technology, no later than 7 days after delivery by written notice and photographic documentation must be sent to Roger Technology together with the relevant documentation, DDT for EU countries and invoice for countries outside the EU.

Any claims for defects of conformity of the goods which are not detectable from external examination of packages should be communicated to the customer service internal to Roger Technology through email to support@rogertechnology.it with related documentation.

Refunds of goods without prior consent in writing by Roger Technology are not accepted, also any type of claim can never give rise to the annulment of all or part of the order, much less to the delay or suspension of payment which will nevertheless always be made in full.

TRANSFER OF OWNERSHIP

Roger Technology retains title to the goods sold until full payment of the same, then it is agreed that the transfer of ownership of the Products sold and orders must be implemented at the same time of total payment of sales invoices. In the event of non-payment, Roger Technology can resume the immediate possession of the products sold anywhere.

TERMS OF PAYMENT

All payments must be made exclusively to Roger Technology and carried out the terms and conditions indicated in the invoice.

In the event that the customer does not comply with the terms of payment agreed between the Parties, Roger Technology will charge interest for late payment of trade receivables to the extent currently regulated by Legislative Decree n. 231 of 2002, or possibly one that will regulate the matter, and this without any formal notice or communication. In the case in which are provided payments in several instalments, or are planned advances and in general in case of late payment to an agreed maturity date by the customer, Roger Technology may suspend the execution of the order or later and further orders. The payments, even if they have different causal indicated by the client, in each case can be attributed to unpaid invoices. Roger Technology may also suspend the execution of orders where is ascertained the substantial change in the structure and/or shareholder of the client, as well as in cases of elevation of protests, enforcement measures or insolvency, emissions of injunctions of payments, suspension deferrals or delays in the fulfilment of obligations to third-party creditors. In the case of total non-payment, the sale may be terminated as of right at any time with a simple written notice by Roger Technology to the client, stating the use of this clause and without the need for any judicial form. All goods delivered and not paid shall be returned to Roger Technology, through the means of Roger Technology or other transports at the expense of the client.

TRADEMARK

The client acknowledges that Roger Technology is the exclusive owner of the trademarks and any other rights of industrial and intellectual property on products as well as catalogues, brochures, internet communication and any other material and documentation related. Any resulting goodwill is exclusively owned by Roger Technology.

The client is fully aware that Roger Technology products are covered by patents and subject to industrial know-how and design exclusive property of Roger Technology.

It is expressly forbidden for the client to violate such rights owned by Roger Technology or in any case remove, conceal or alter any trademark or other distinguishing marks affixed to the products as well as to put new one of any kind. Unless authorized in writing by Roger Technology, it is forbidden any form of reproduction or use of the Roger Technology trademark or any other distinctive mark on the products.

ACCREDITATIONS

The Roger Technology products show in the appropriate documentation, the necessary data identification of accreditations obtained. Familiarity and compliance with any regulations governing the use of radio controls and equipment are burden on the installer and the user who performs the installation.

EXCEPTIONS

At the time of signing the contract or order confirmation the client accepts these conditions of sale. Any changes thereto must be signed by Roger Technology before signing the order, which is valid in any case for each contract.

JURISDICTION

For any dispute that may arise during the course of the contract and individual sales contracts governed by the same, shall be exclusively settled by the Court of Treviso.



CENTRE OF TECHNOLOGY




A company soul full of passion and close to your needs

Roger Technology was founded by a group of people with an extreme passion and desire to create revolutionary products for the gate and home automation industry. We challenge ourselves constantly and believe that a simple idea can give life to brilliant new products that will set the standard for the gate and home automation industry in the future.



WELCOME TO OUR B2B AREA

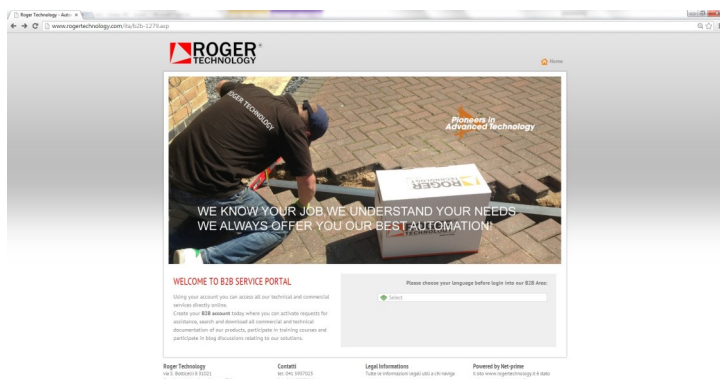

To register or login into our online customer service:

WWW.ROGERTECHNOLOGY.COM/B2B

To discover our national and international:

WWW.ROGERTECHNOLOGY.COM/DEALERS

ROGER TECHNOLOGY S.R.L.

MANUFACTURING PLANT

Via S. Botticelli, 8 - 31021
Bonisiolo di Mogliano Veneto (TV)
ITALIA

SALES DEPARTMENT AND WAREHOUSE

Via S. Botticelli, 5 - 31021
Bonisiolo di Mogliano Veneto (TV)
ITALIA

P.Iva, C.F. e n° iscr. Cam. Com.
TV: 01612340263

Tel. +39 041 5937023
Fax +39 041 5937024
info@rogertechnology.com

WWW.ROGERTECHNOLOGY.COM





THE WAY TO INSTALL YOUR GATES AUTOMATION HAS CHANGED
FIND OUT ON

WWW.WEAREBRUSHLESS.COM

ROGER TECHNOLOGY

Via S. Botticelli, 8 - 31021, Bonisolo di Mogliano Veneto (TV)

T. +39 041 5937023 - F. +39 041 5937024

info@rogertechnology.it

WWW.ROGERTECHNOLOGY.COM